
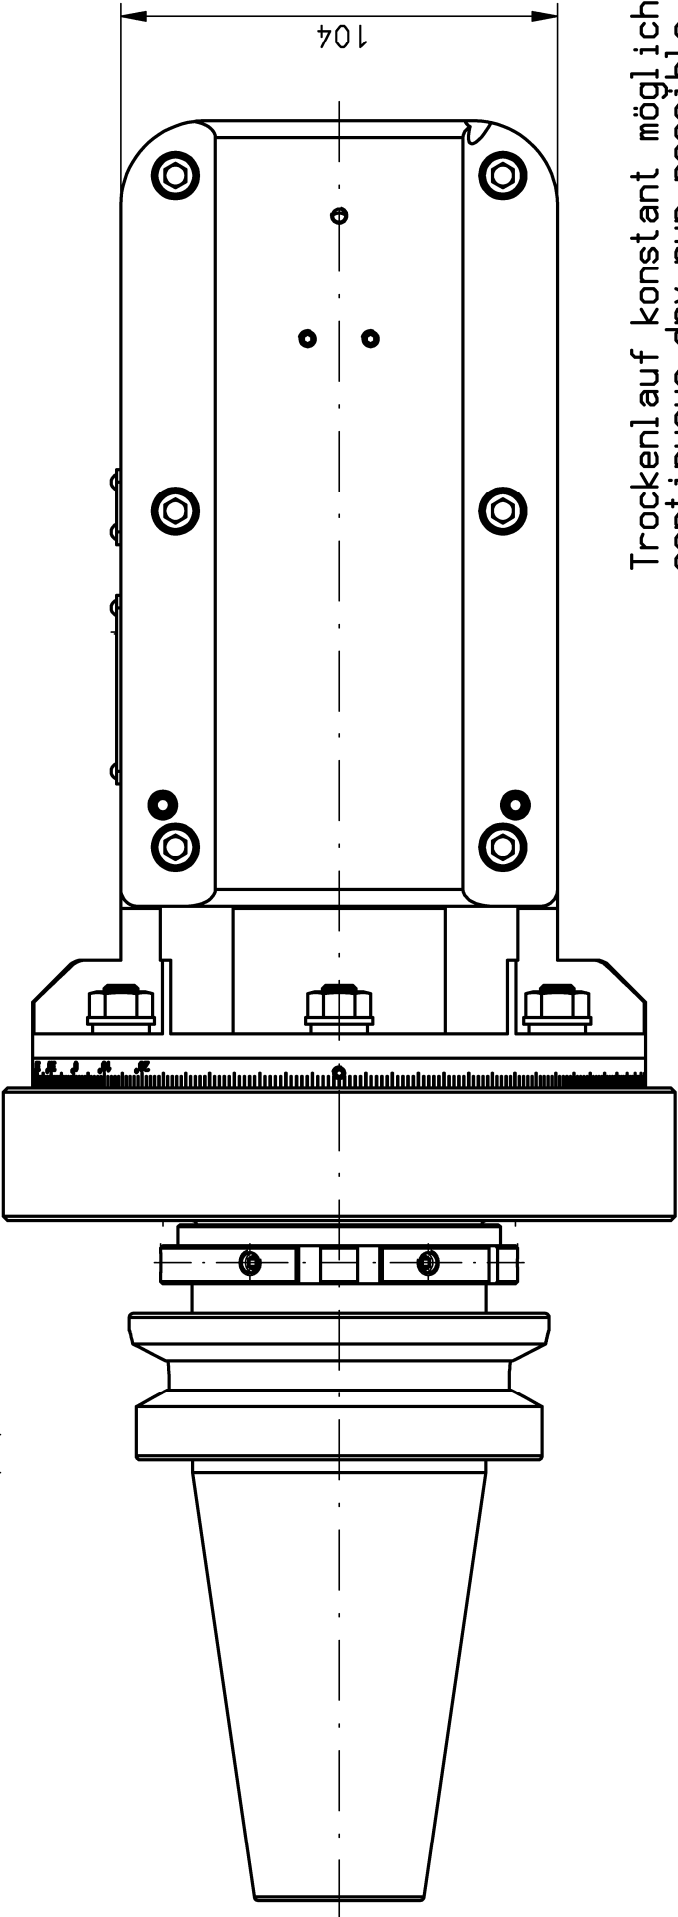


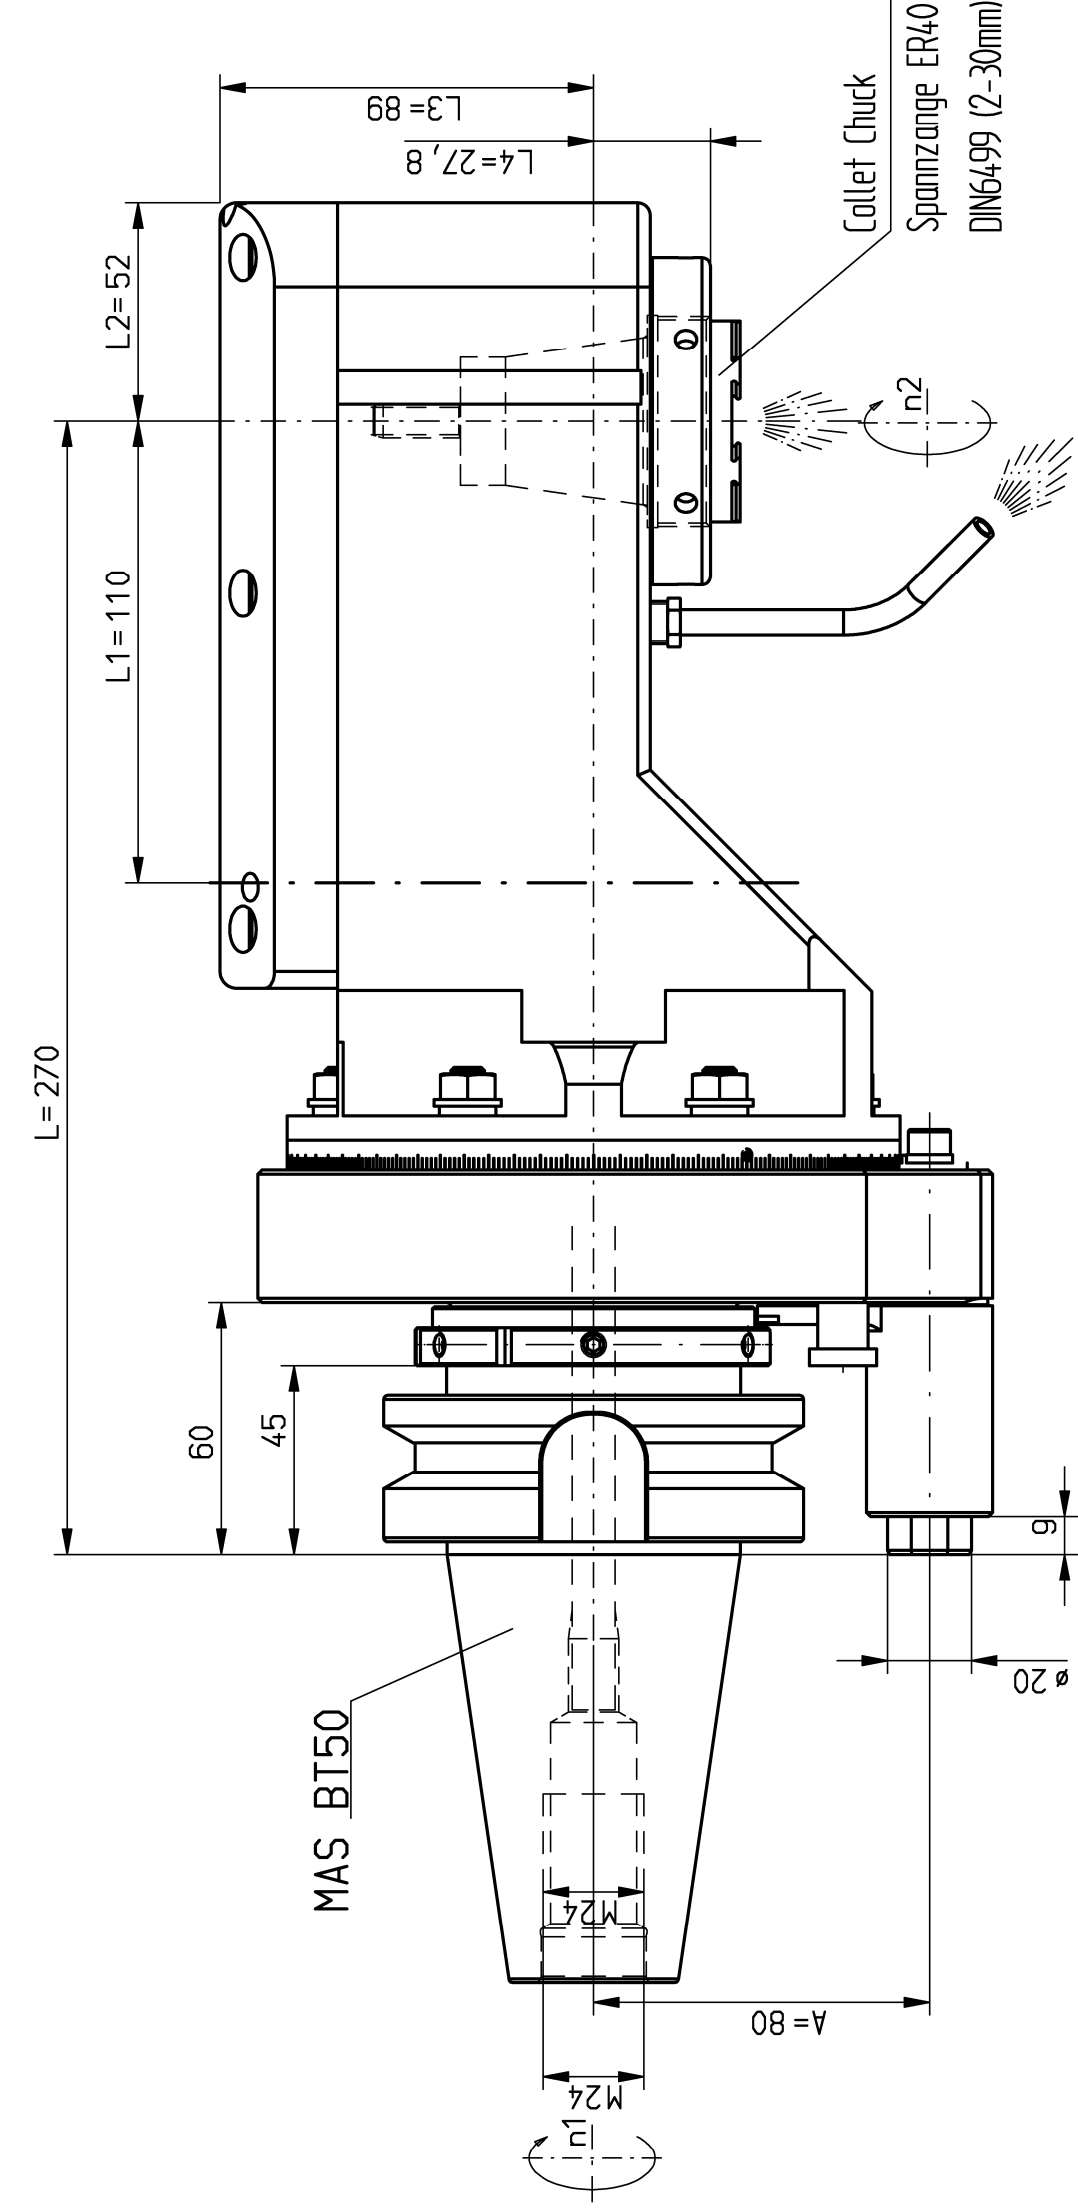

Trockenlauf konstant möglich
continuous dry run possible



- n1(max) = 5000 U/min
- n2(max) = 5000 U/min
- M (max) = 150 Nm
- i(n1/n2) = 1 : 1
- p(max) = 70bar
- Filterfeinheit: max. 0,05mm
- grade of filtration: max. 0,05mm

keine Drehrichtungsumkehr
direction of rotation not reversal

Kühlmittelfzufuhr i.K. durch die Spindel
und e.K. über Spritzrohr
internal coolant supply through the spindle
and external coolant supply through pipes

Kopf 360° drehbar
head 360° adjustable

Gewicht ca. 19kg
weigh around 19kg

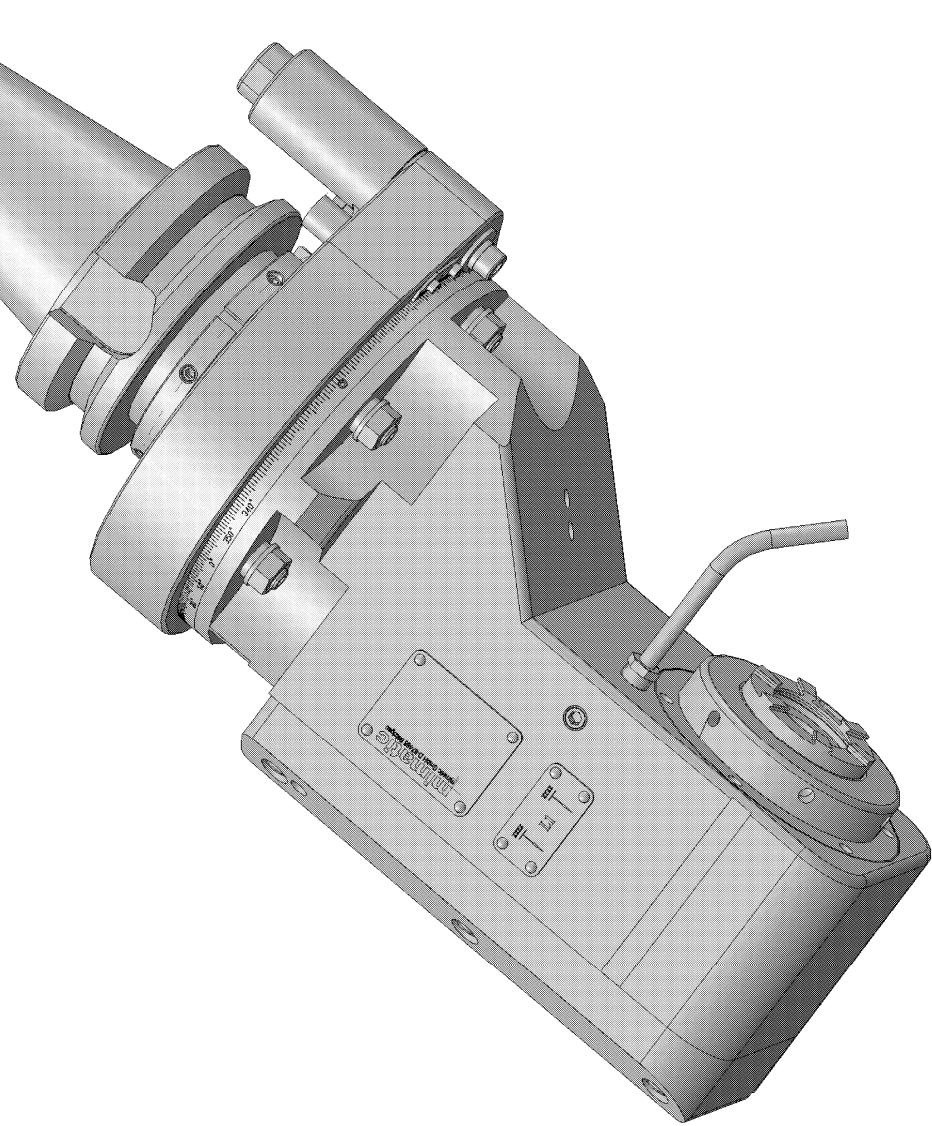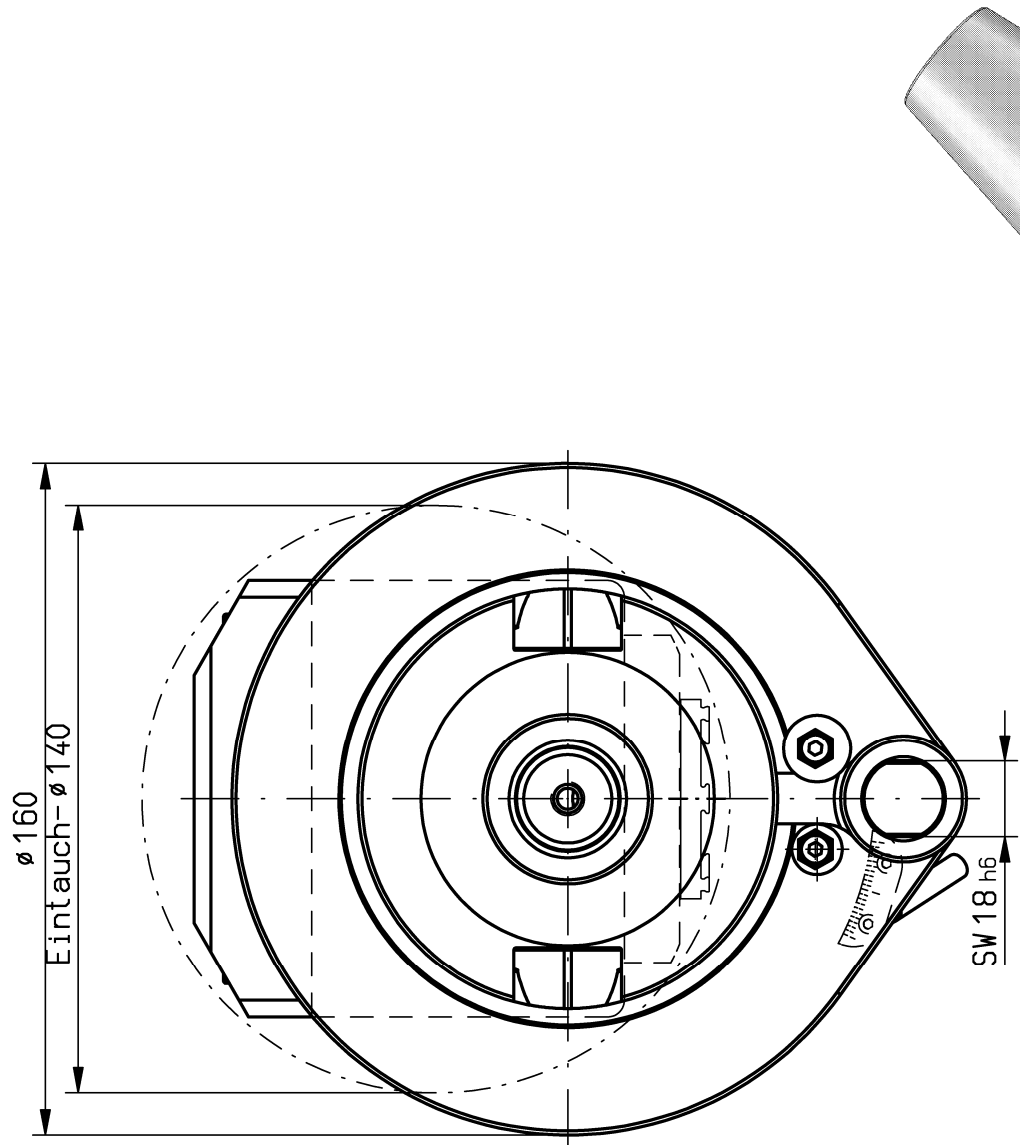

A162878		ID-Nr.	Alg. Tol.	ZM-Nr.	Maßstab	1:1	18205772
			ISO 2768-m		Werkstoff:		
		manuelle Änderung	16.08.2018	Datum	Maßblatt		
			Bearb. 10.08.2018	Schulholz	Name		
			Gepr. 16.08.2018	Schulholz	Schulholz		
			F/M/Q				
			dw. C. 00146315: SZA				
			Zeichnungs-Nr.:				
			00054488				
Zust.	Änderung	Datum	Name	Urspr.	00021828	Ers. d.:	plattserver

mimatic
Tool Systems

mimatic 87488 Betziguu – Westendstraße 3
Bett
Tel.: 0831/57444-0 Fax.: -90

WK-ZN9-BT50-ER40-I

1:1 L=270

Blatt