


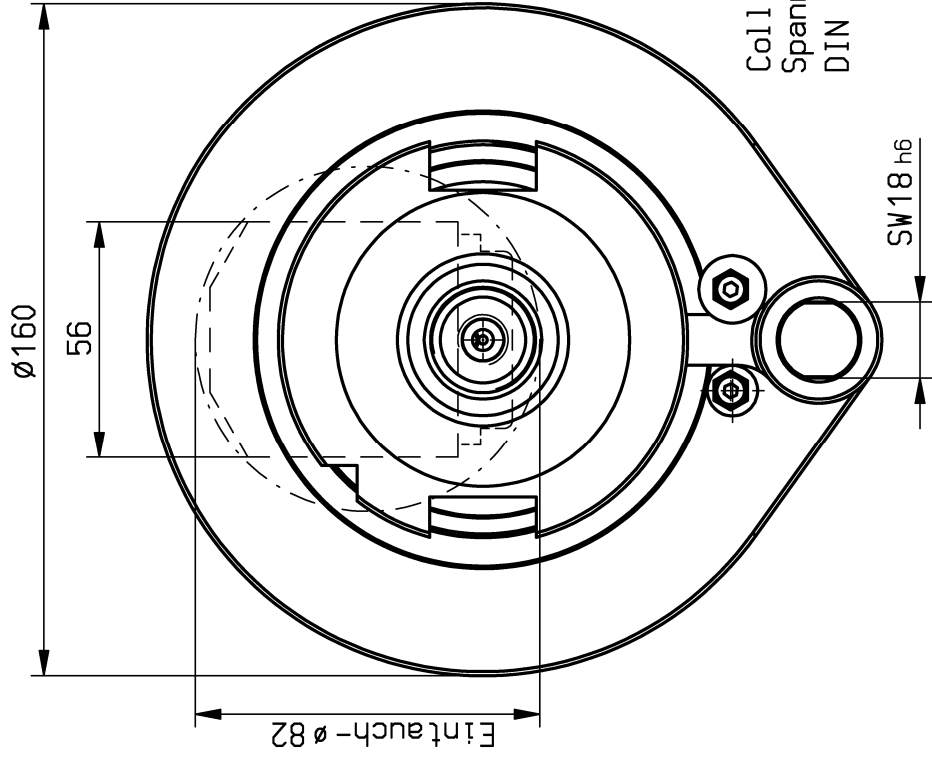


n1(max) = 8000 U/min
n2(max) = 8000 U/min
M (max) = 30 Nm
i(n1/n2) = 1 : 1
p(max) = 70bar
Filterfeinheit: max. 0,05mm
grade of filtration: max. 0,05mm

Drehrichtungsumkehr
direction of rotation reversal


Kühlmittelzufuhr e.K. über Spritzrohr
external coolant supply through pipes

Kopf 360° drehbar
head 360° adjustable

Gewicht ca. 12kg
weigh around 12kg

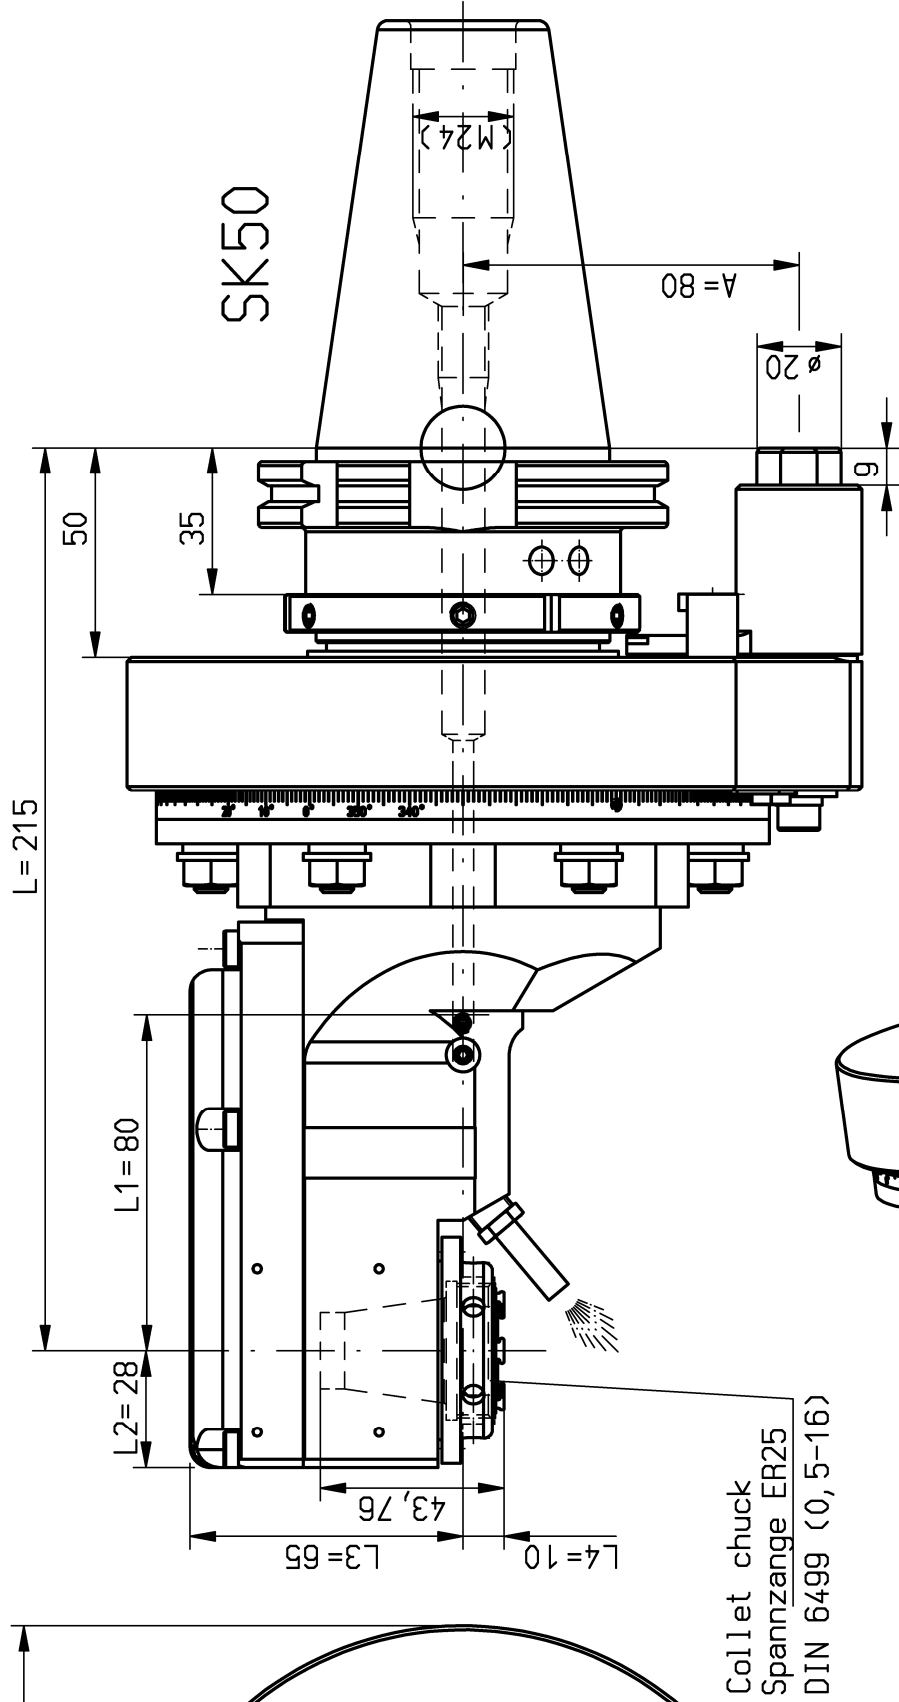

Collet chuck
Spannzange ER25
DIN 6499 (0,5-16)

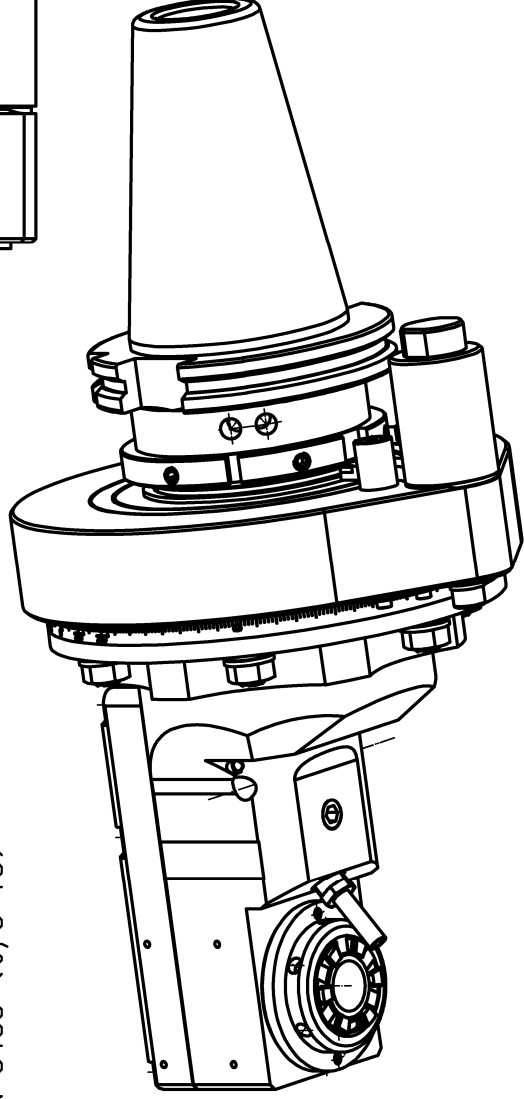

A162926		ID-Nr.	Allg. Tol.		ZWF-Bl.	Maßstab	1:1.5
		manuelle Änderung	ISO 2768-m			Werkstoff:	
			04.04.2019			Maßblatt	
				Datum	Name	mimatic® Tool Systems mimatic 87488 Betzigau – Westendstraße 3 GmbH Tel.: 0831/57444-0 Fax.: -90	
				Bearb. 15.12.2014	Krapp		
				Gepr. 04.04.2019	Krapp		
				F/N/Q			
					cad. C: 00149955.SZA	WK-ZWS5-SK50-ER25-E	
					Zeichnungs-Nr.:		
					00046816	1:1 L215	
01	auf 30.05. geändert	11.02.2019	Heizh			Ers. f.:	
Zust.	Änderung	Datum	Name	Urspr. 00022548			
						Ers. d.: Plotserver	