

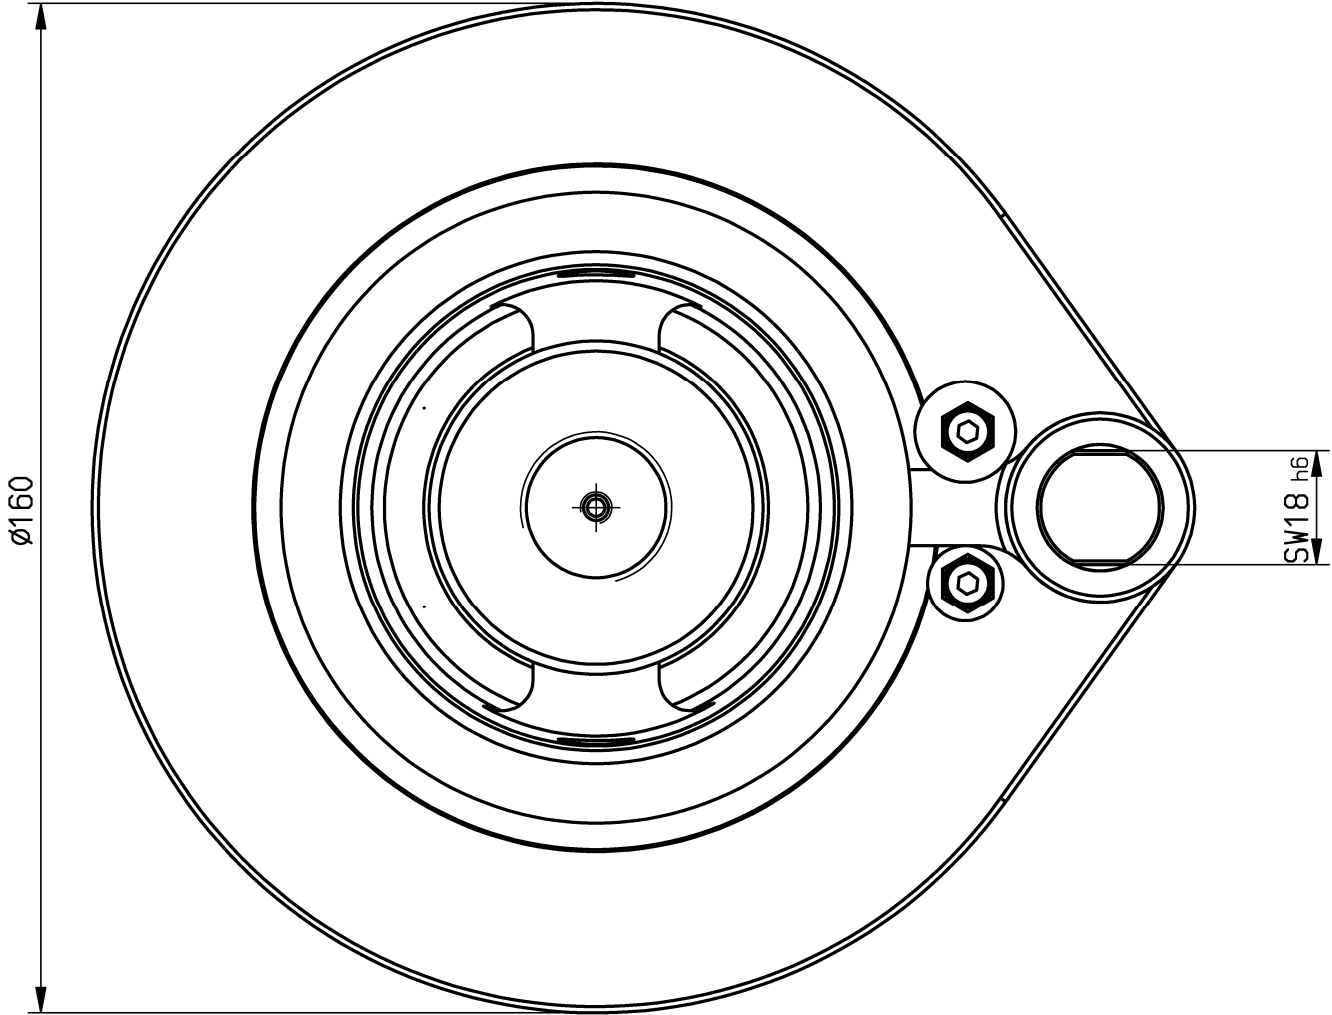


218

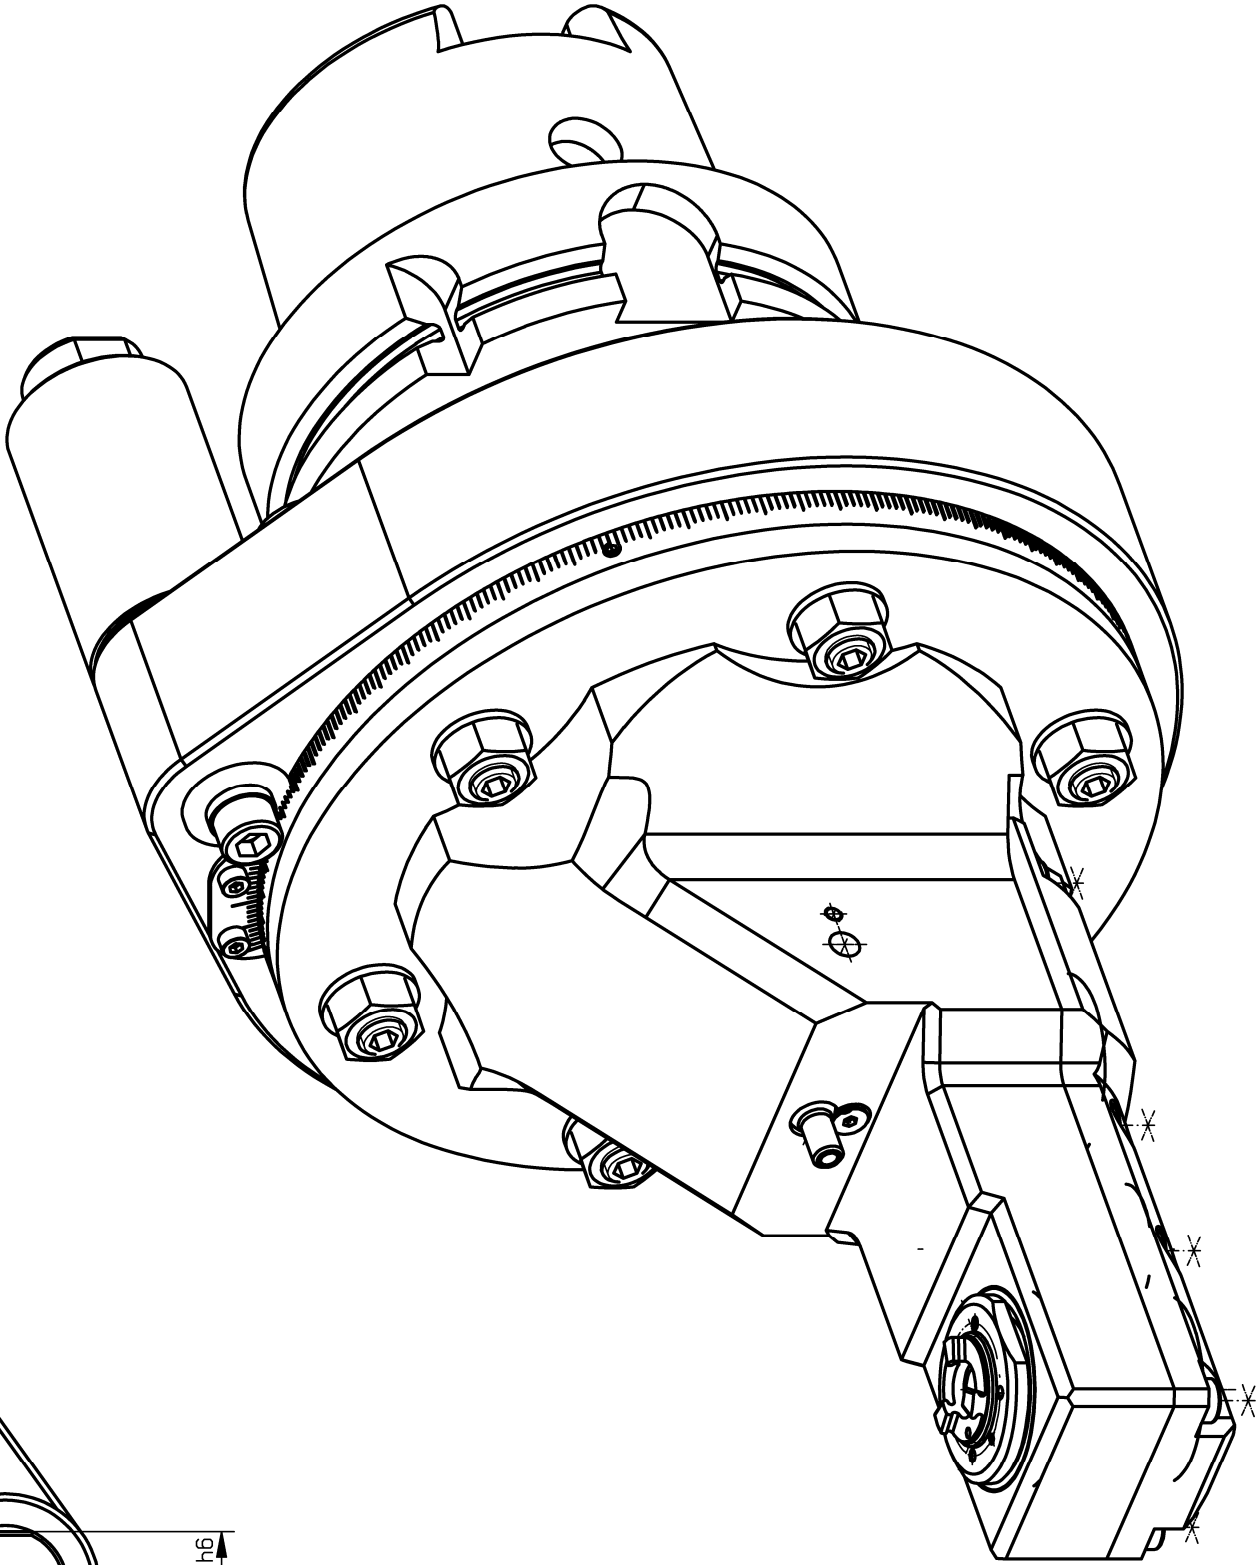

n1(max) = 7200 U/min
n2(max) = 12000 U/min
n2(max) = 15000 U/min ED- 10%
M (max) = 6 Nm
i (n1/n2) = 1 : 1,67
Drehrichtungsumkehr
direction of rotation reversal
Gewicht ca. 12kg
weight around 12kg
externe Kühlmittelzufuhr
external coolant supply
Kopf 360° drehbar
head 360° adjustable

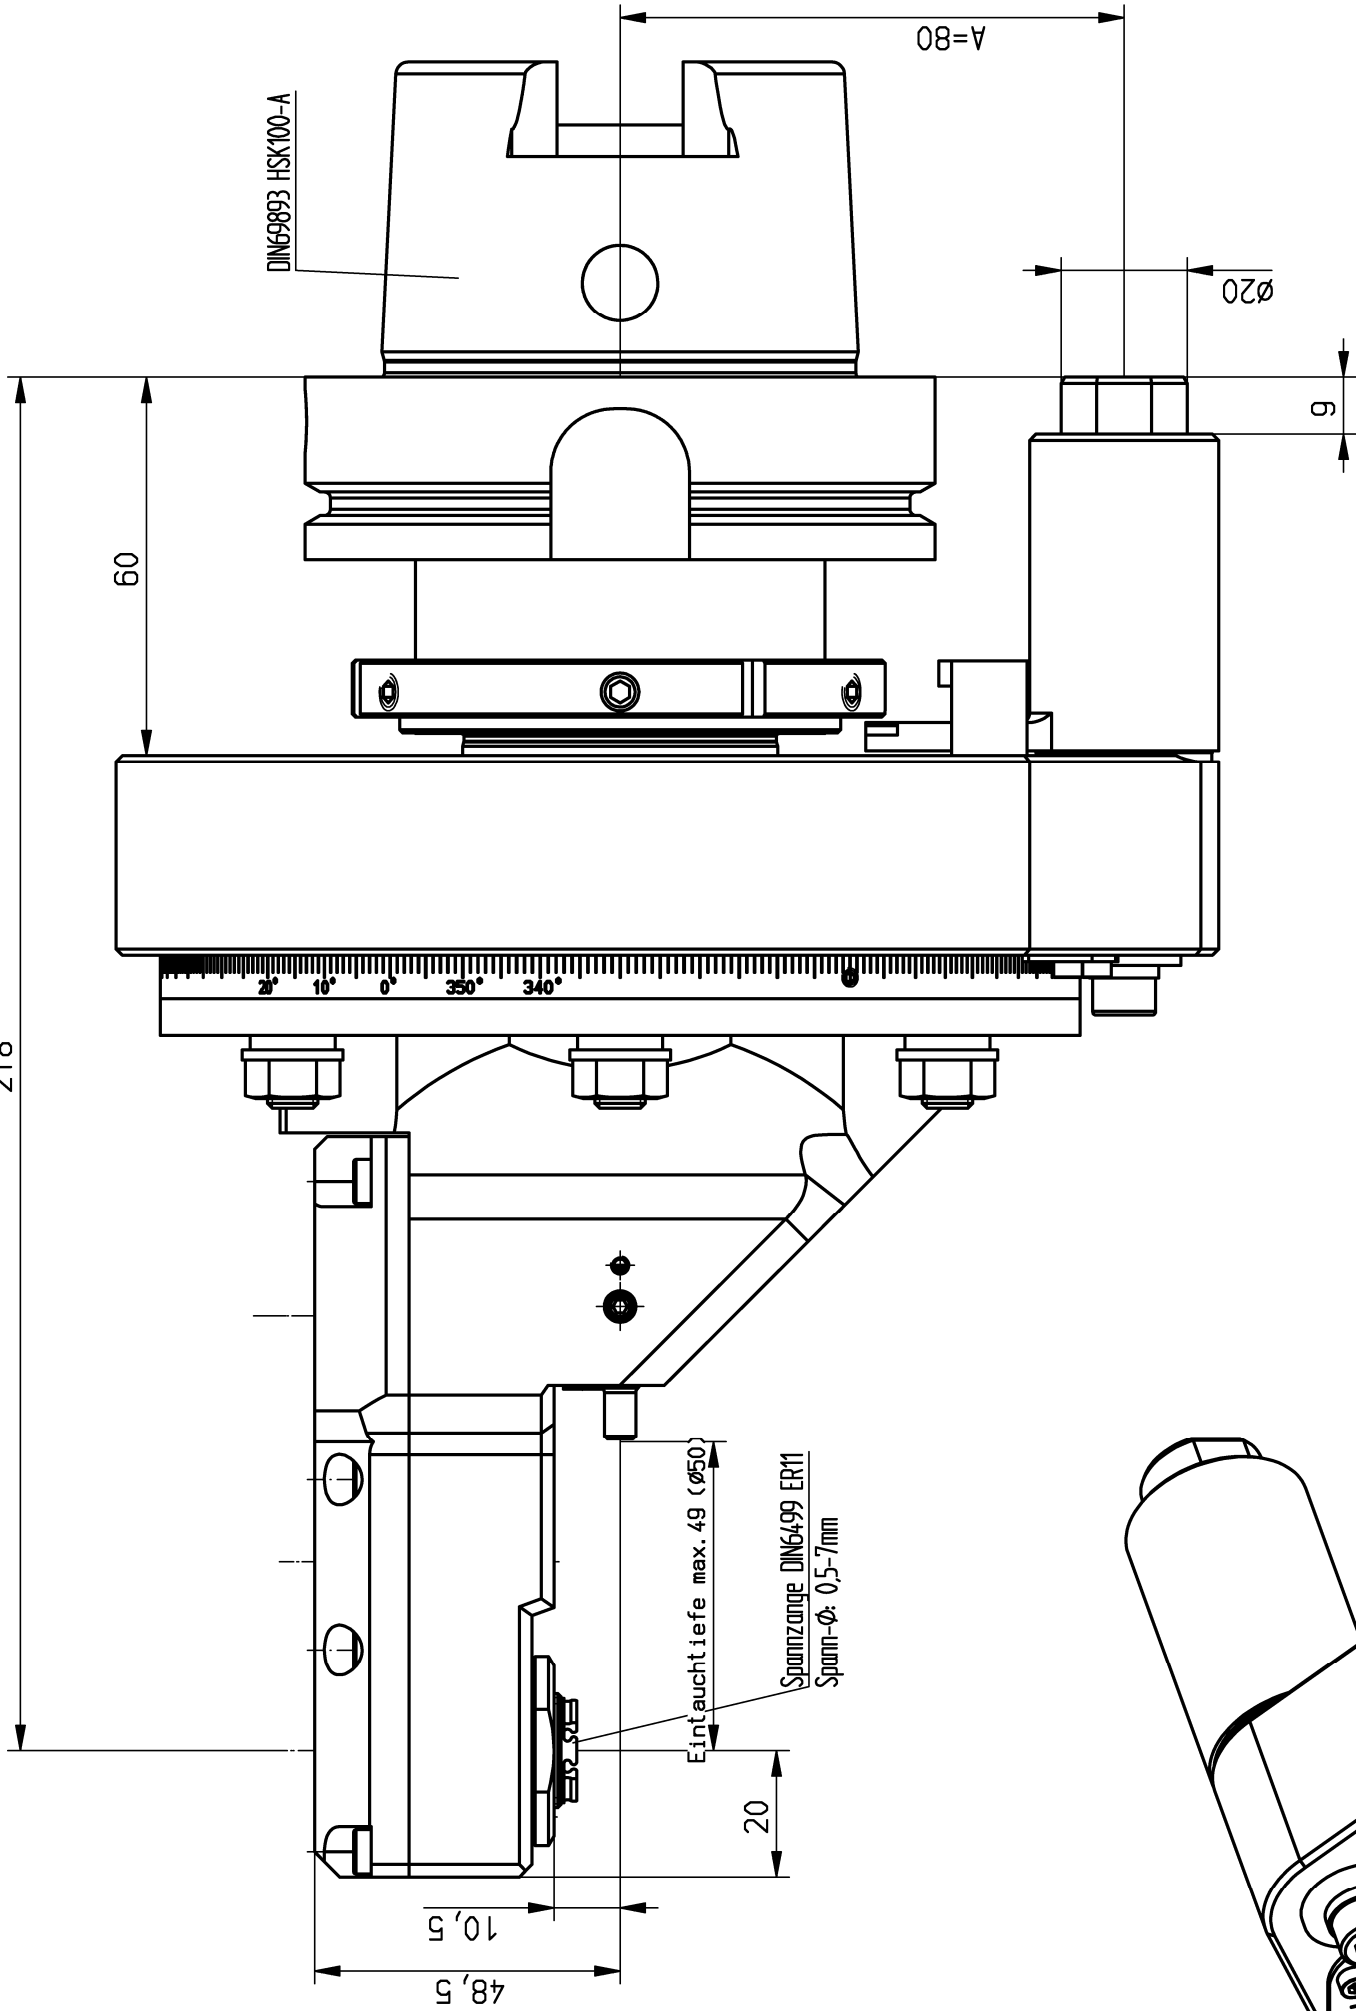

A182875		ID-Nr.	Allg. Tol.		ZWNH		Maßstab 1:1			
				ISO 2768-m			Werkstoff: Maßblatt			
				2083.0201.0014						
							mimatic® i o o i s y s t e m s mimatic 87488 Betzigau – Westendstraße 3 GmbH Tel.: 0831/57444-0 Fax.: -90 WK-ZWS0-HSK100-ER11-E Blatt			
manuelle Änderung					Datum	Name				
					Bearb. 04.03.2014	Aniser				
					Gepr. 26.03.2014	Aniser				
					Norm					
					c/w C.00101756.5ZA					
					Zeichnungs-Nr.:					
					00045017					
Zust.		Änderung	Datum	Name	Urspr. 00045017-Z		Ers. f.:		Ers. d.: Plotsrver	
							Bl.		Bl.	