
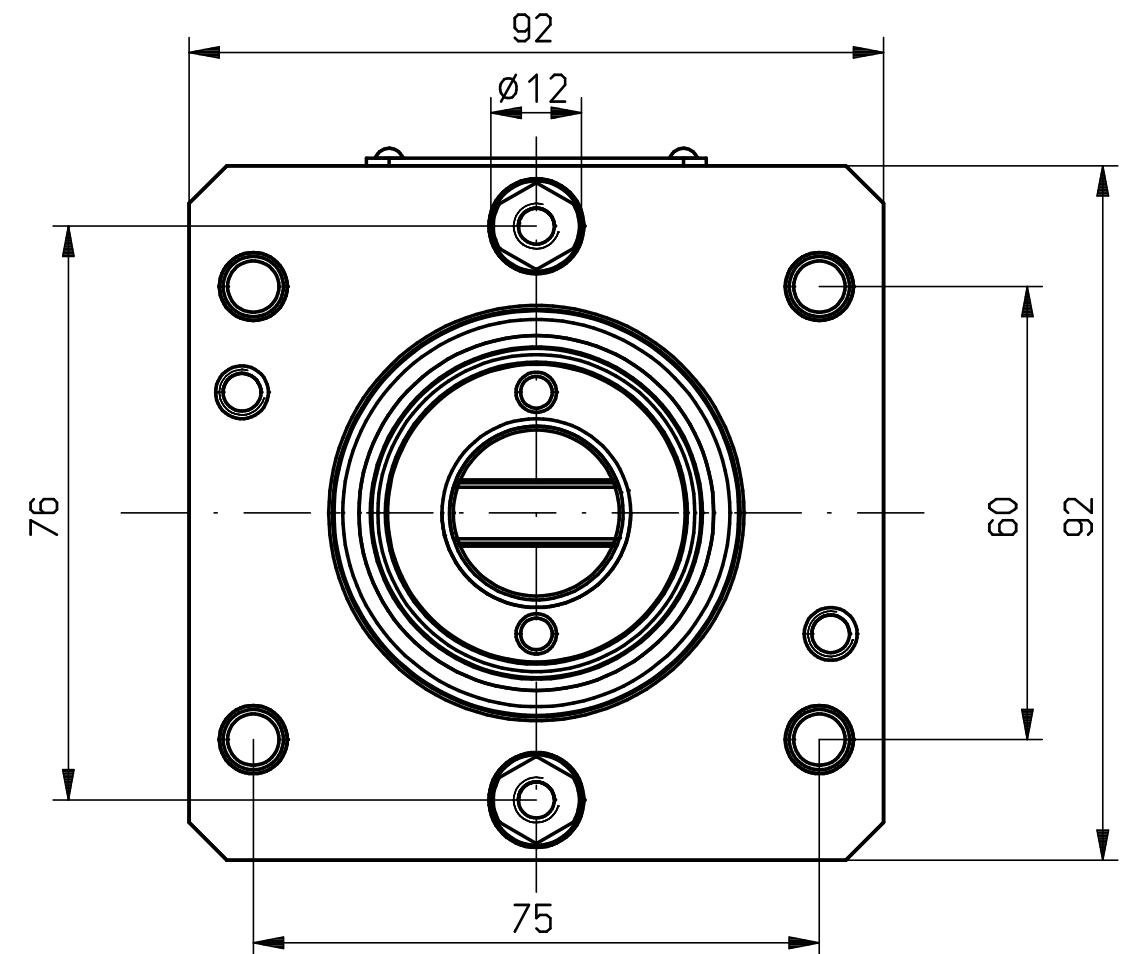


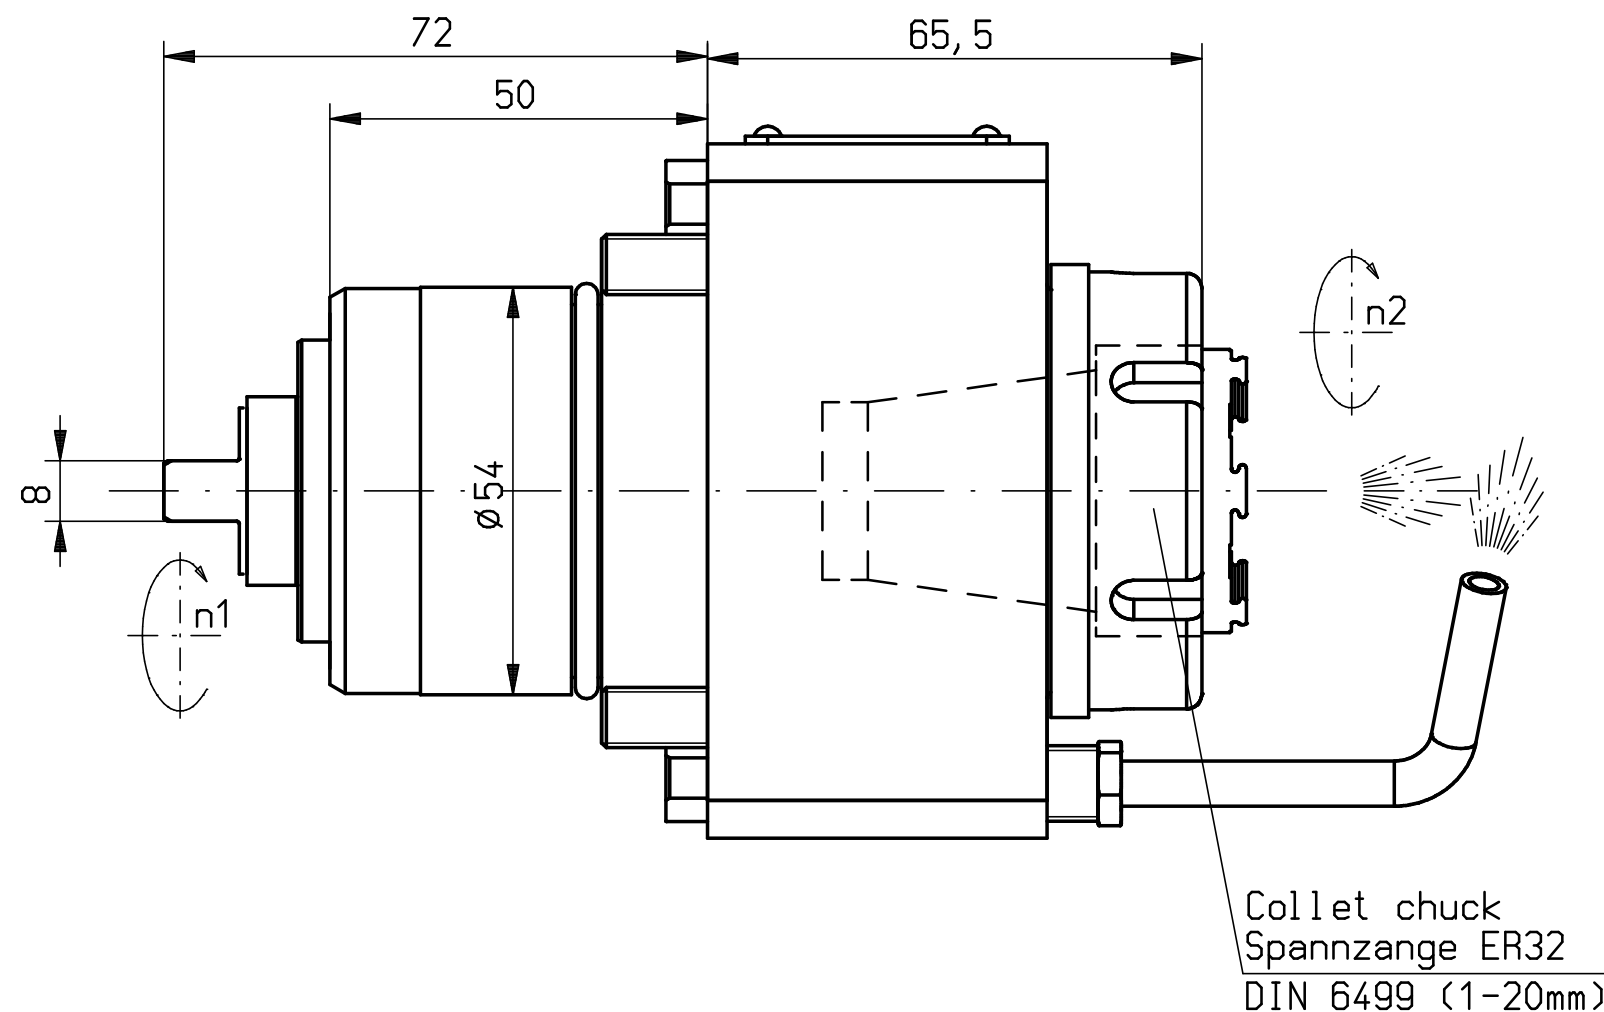


Trockenlauf konstant möglich
continuous dry run possible

n1(max) = 6000 U/min
n2(max) = 6000 U/min
M (max) = 70 Nm
i(n1/n2) = 1 : 1
p(max) = 70bar
Filterfeinheit: max. 0,05mm
grade of filtration: max. 0,05mm

keine Drehrichtungsumkehr
direction of rotation not reversal

Kühlmittelzufuhr i.K. durch die Spindel
und e.K. über Spritzrohr
internal coolant supply through the spindle
and external coolant supply through pipes

Gewicht ca. 4kg
weigh around 4kg

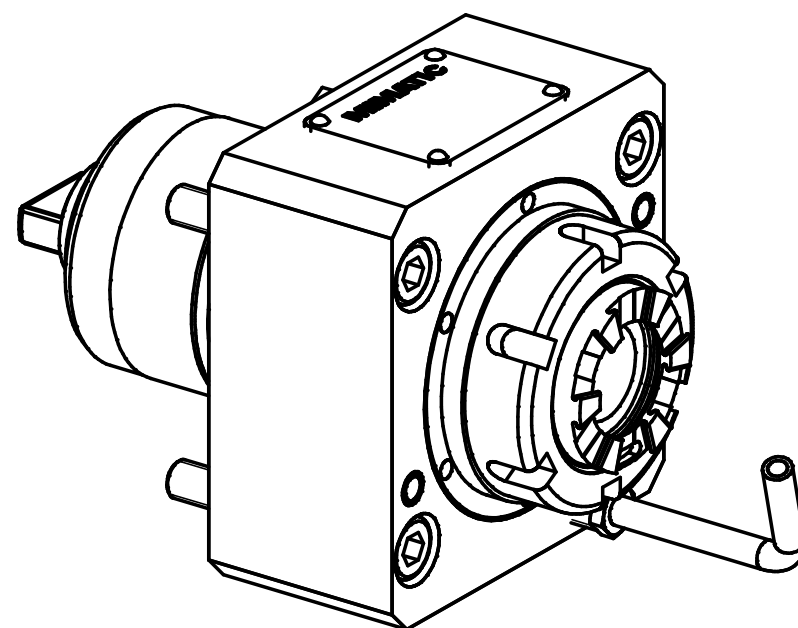

A196754				ID-Nr.	Allg. Tol.		ZMN-BL	Maßstab 1:1		PG102		
					ISO 2768-mK			Werkstoff:				
					24.07.2025		Maßblatt					
manuelle Änderung						Datum	Name		mimatic® Tool Systems mimatic 87488 Betzigau – Westendstraße 3 GmbH Tel.: 0831/57444-0 Fax.: -90			
					Bearb.	22.10.2018	Krapp					
					Gepr.							
					F/M/Q							
					CAD: C: 00177223.SZA							
					Zeichnungs-Nr.:					AGW-MI-A-54-ER32-I		Blatt
					00054798							
01	auf 3D-Ref-Teile geä			10.05.2023	Holz	Urspr. 48622/53963					Ers. f.:	Ers. d.: M. Krapp
Zust.	Änderung			Datum	Name							