
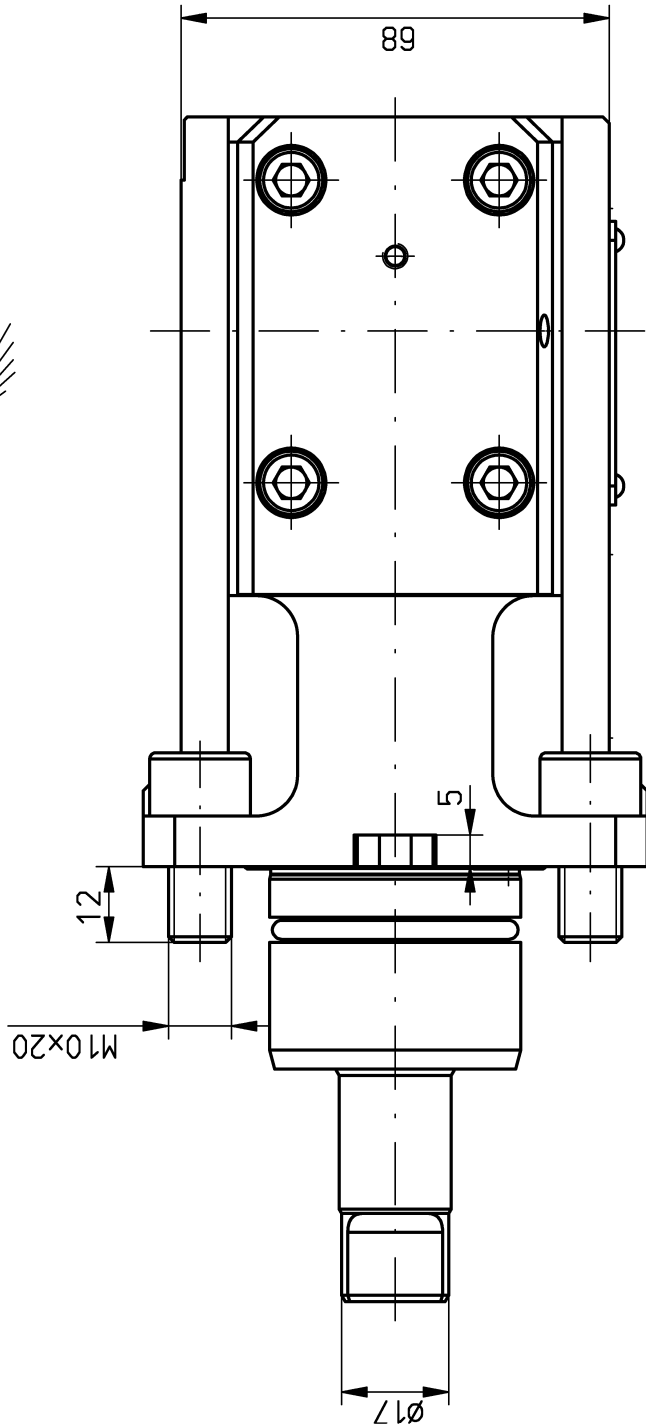
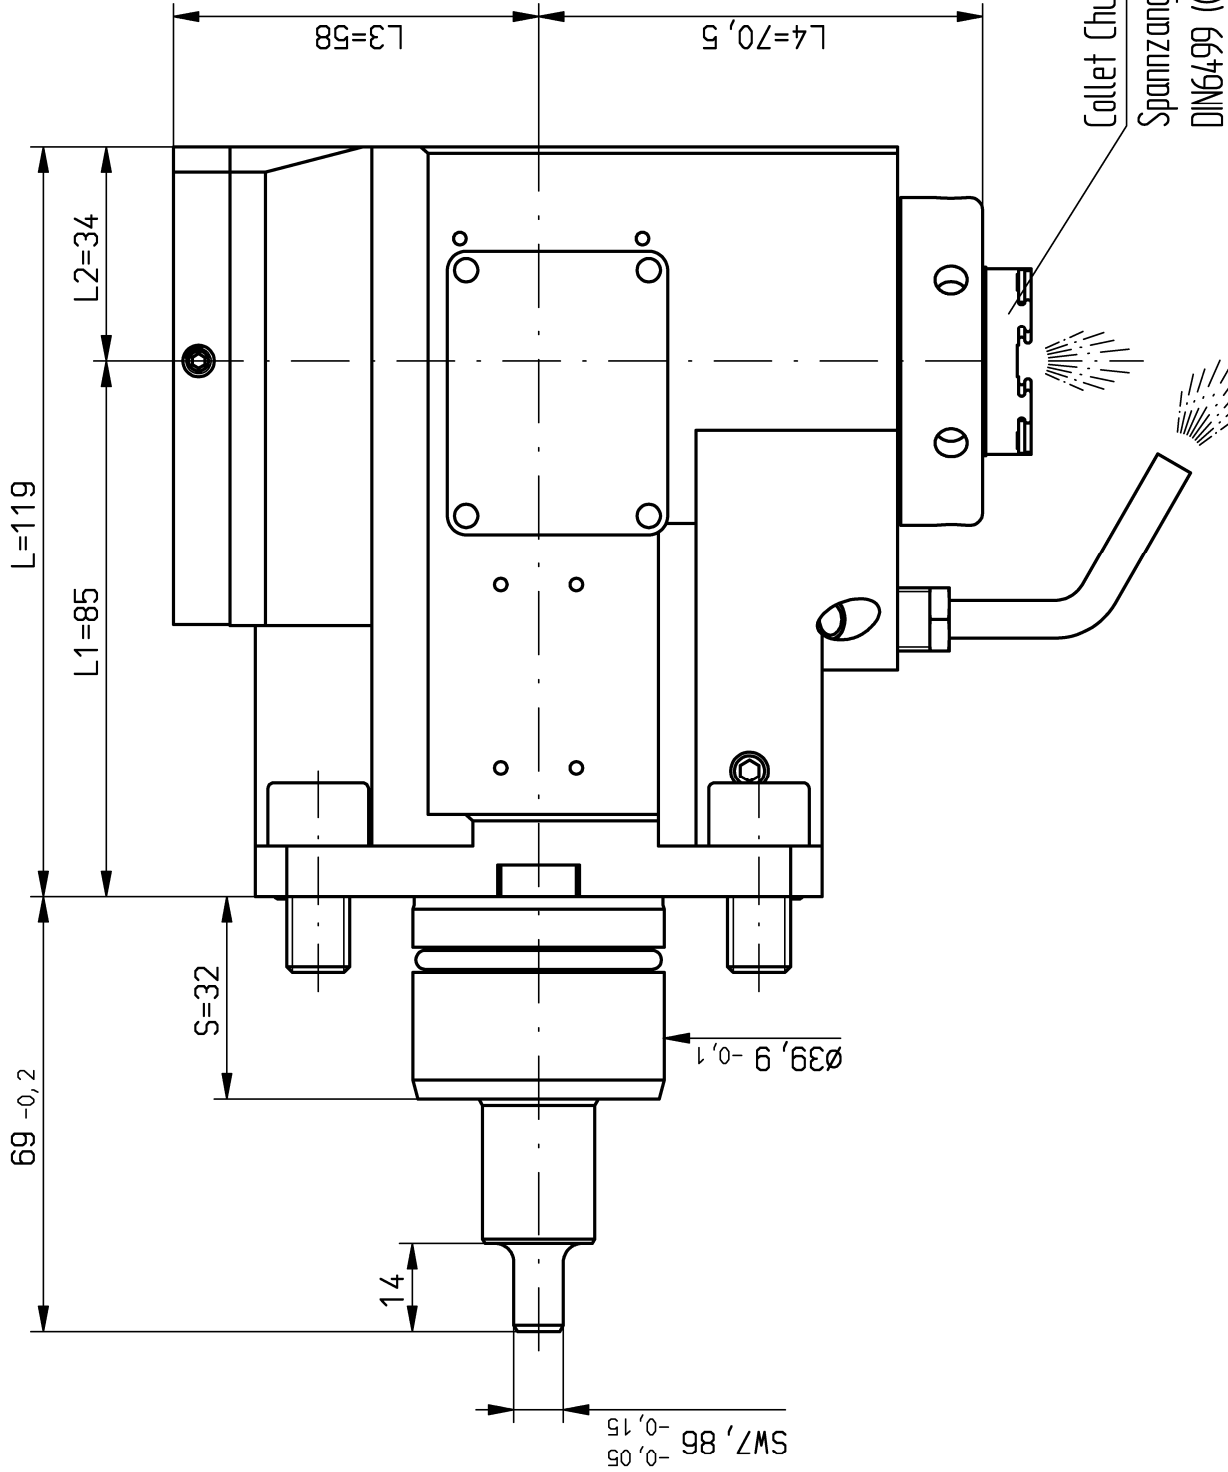
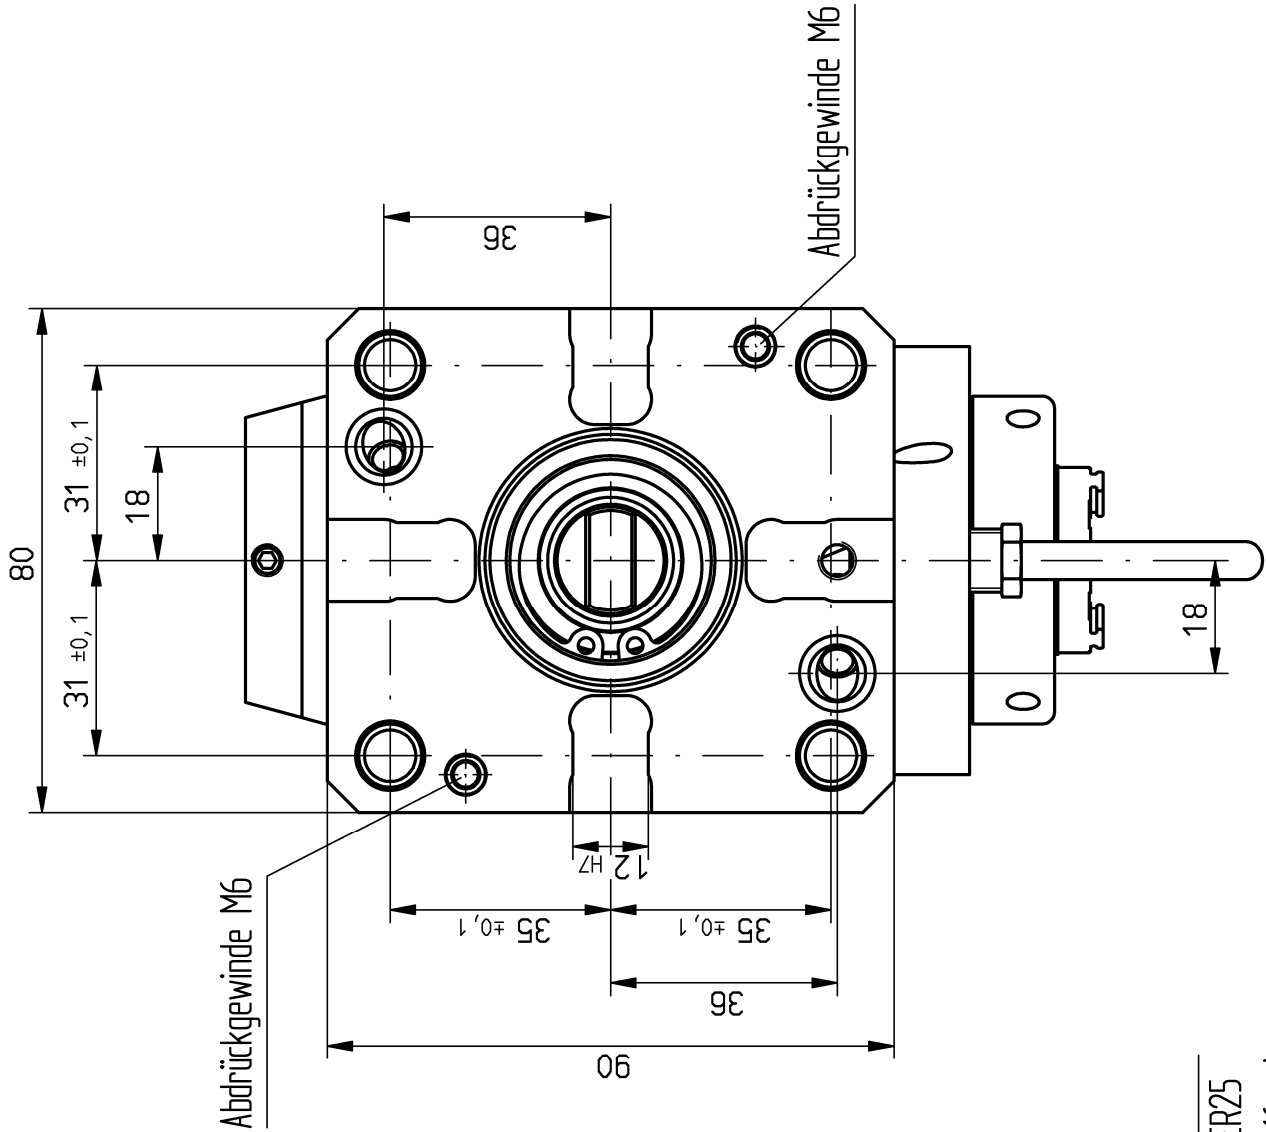


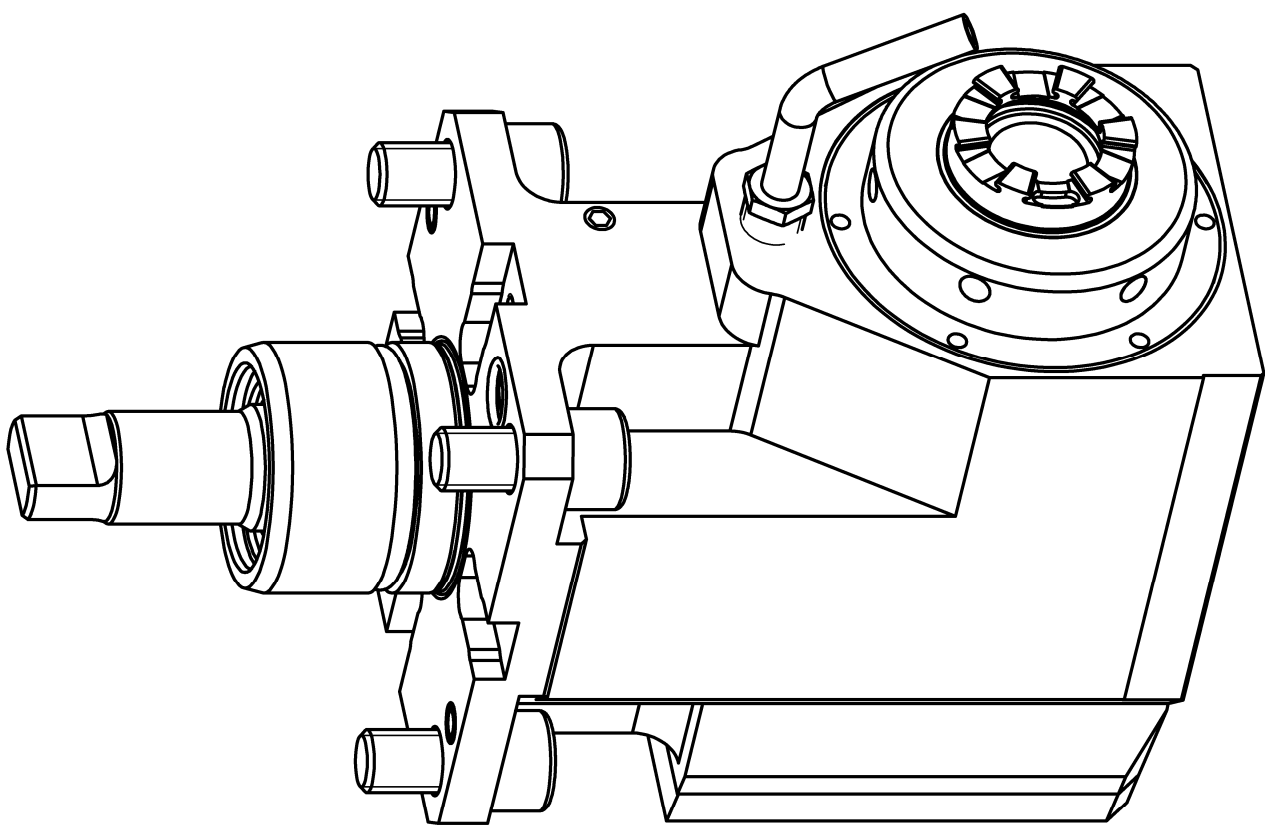

Trockenlauf bei ausreichender Abkühlphase konstant möglich.
keine Druckluft im Kühlmittel-System zulässig
Max. Werkzeugtemperatur 90°C
continuous dry run possible with sufficient cooling phase.
no compressed air allowed in the cooling-system
Max. tool temperature 90°C.

- n1(max) = 6500 U/min
- n2(max) = 13000 U/min
- M (max) = 20 Nm
- i(n1/n2) = 1 : 2
- p(max) = 70bar
- Filterfeinheit: max. 0,05mm
- grade of filtration: max. 0,05mm

Drehrichtungsumkehr
direction of rotation reversal

Kühlmittelzufuhr i.K. durch die Spindel
und e.K. über Spritzrohr
internal coolant supply through the spindle
and external coolant supply through pipes

Gewicht ca. 5,5kg
weight around 5,5kg

Kopf 180° drehbar
head 180° adjustable

Only for information !
When one change, the drawing does not interchange

It is strictly prohibited to copy,
reproduce or develop these drawings
to third persons without having our
written permission. A copyright violation
involves a claim for damages and is
indictable if it is premeditative done.
Fa. mimatic GmbH

A188805		ID-Nr.	Allg. Tol.		ZM-Nr.	Maßstab 1:1		
			ISO 2768-m			Werkstoff:		
			14.03.2023			Maßblatt		