


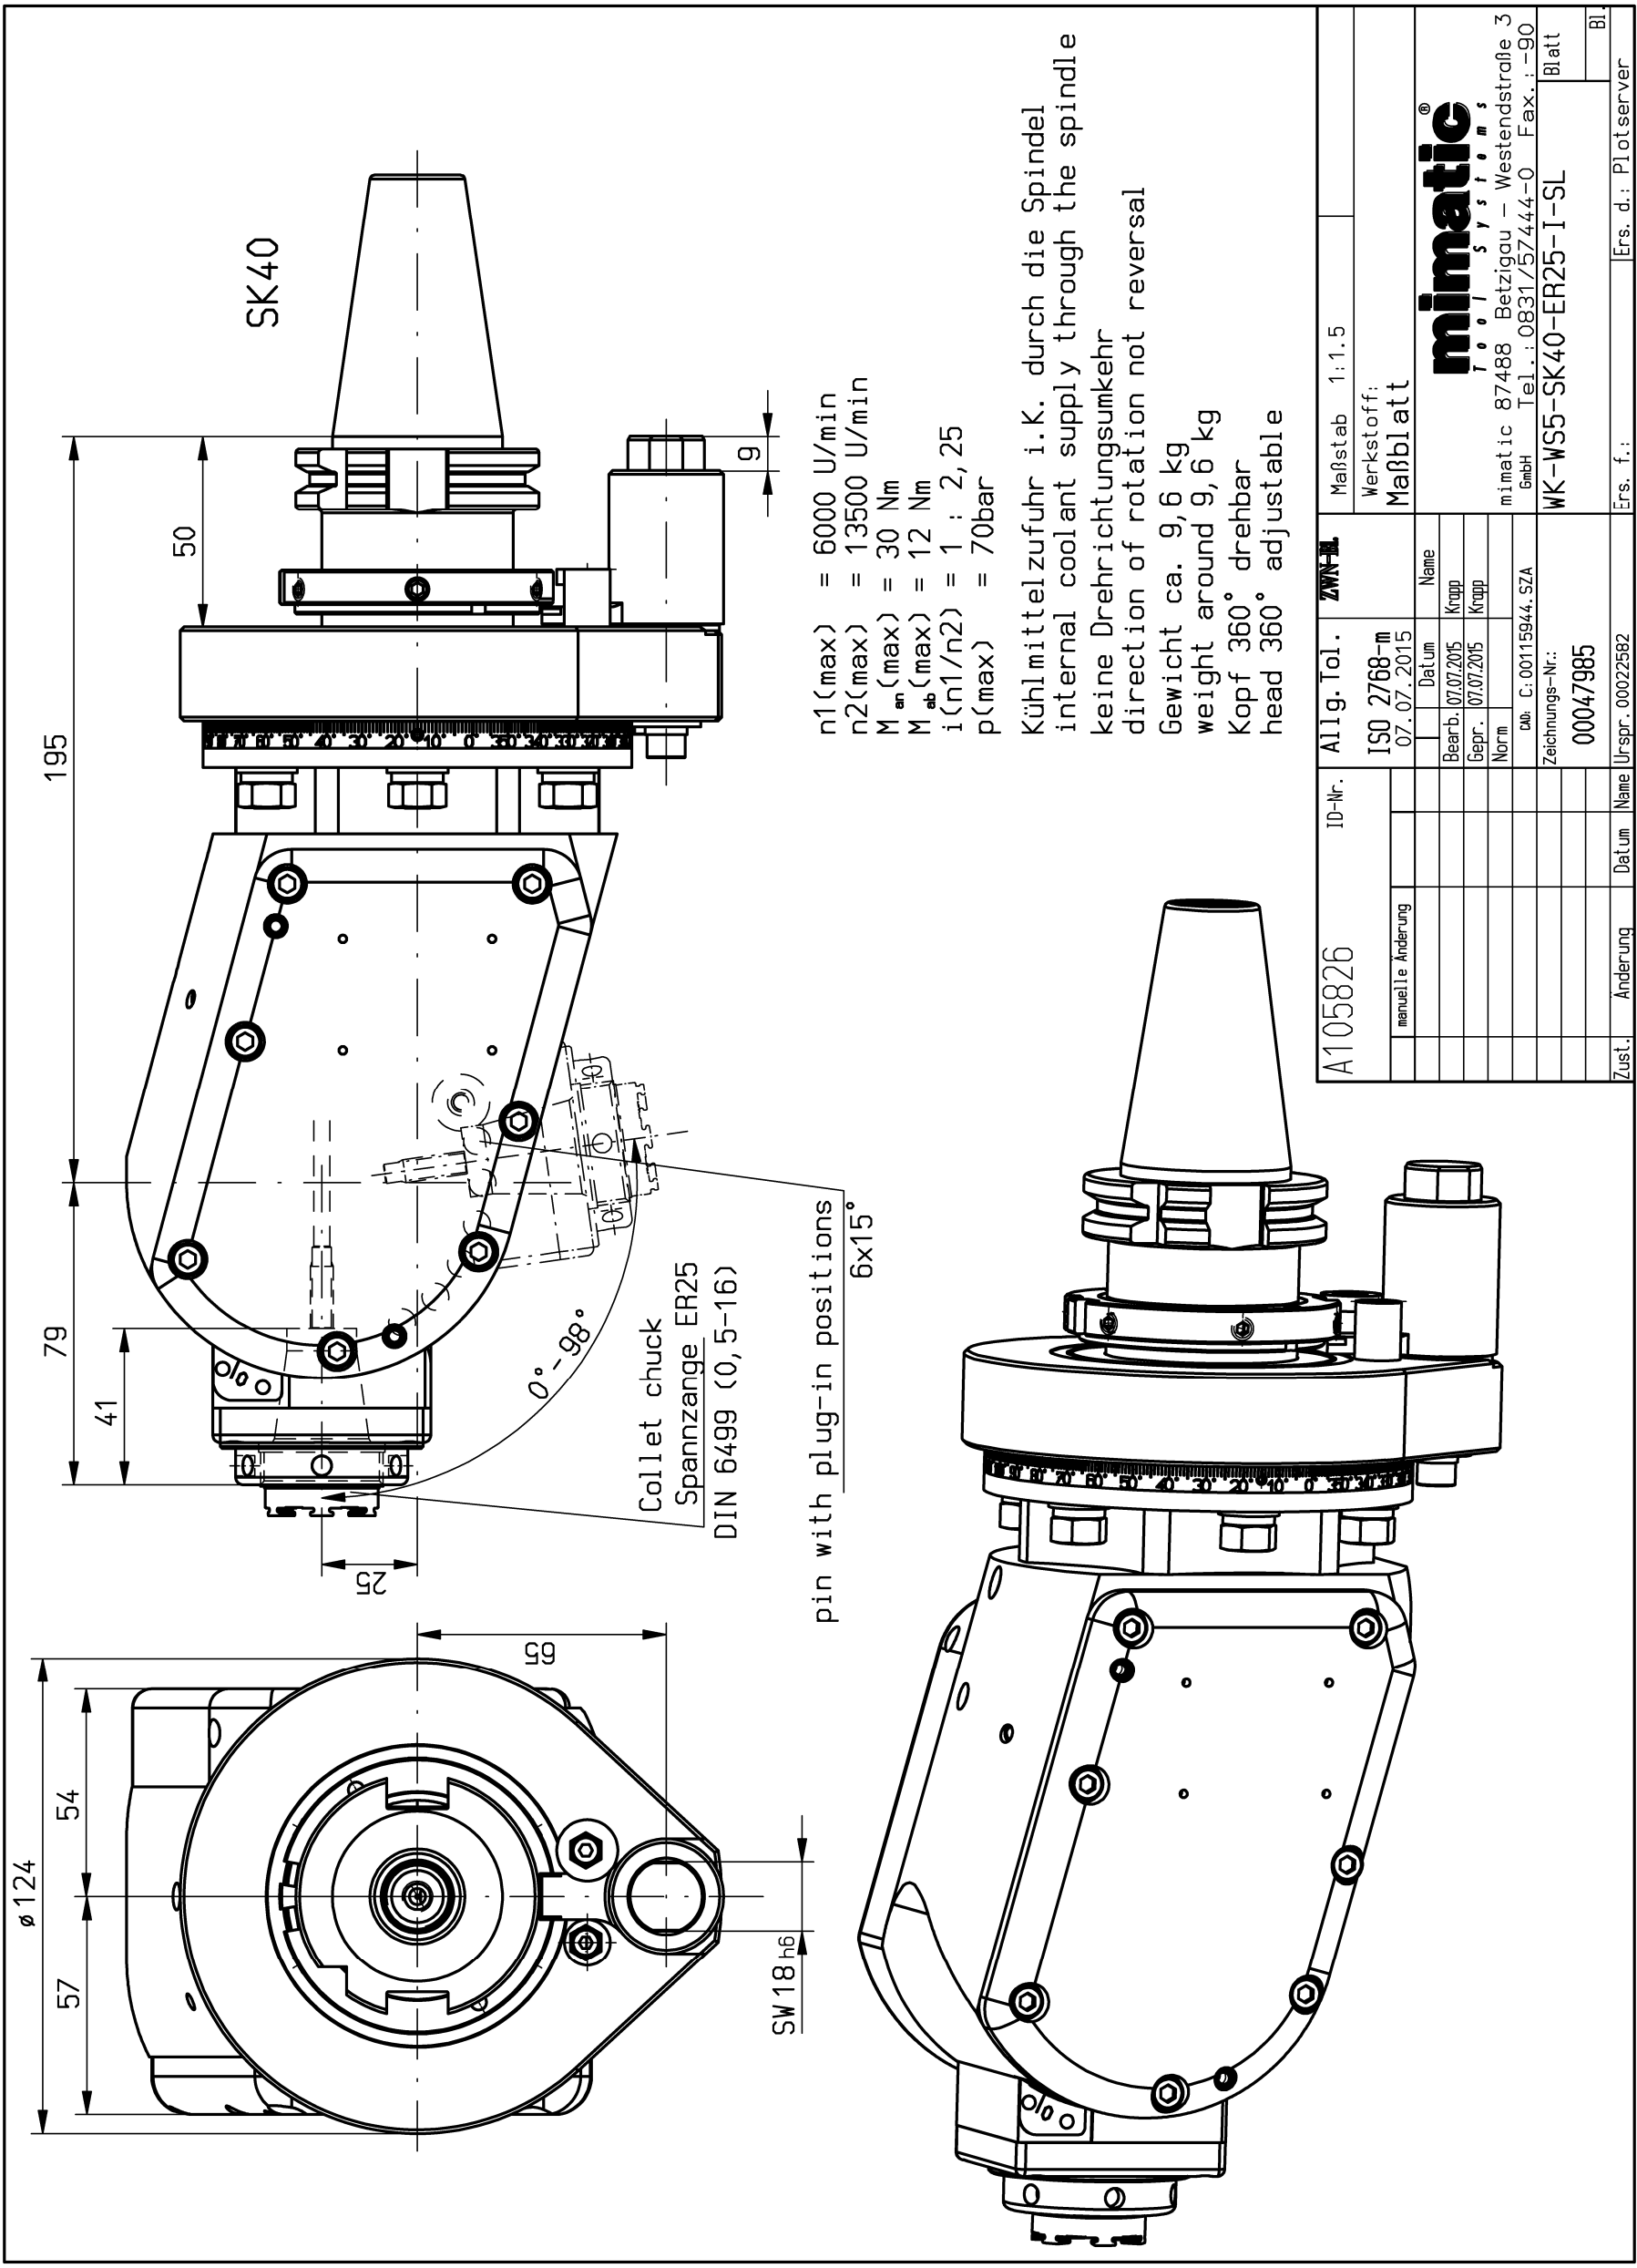

n1(max) = 6000 U/min
n2(max) = 13500 U/min
M_{en}(max) = 30 Nm
M_{ab}(max) = 12 Nm
i(n1/n2) = 1 : 2, 25
p(max) = 70bar

Kühlmittelzufuhr i.K. durch die Spindel
internal coolant supply through the spindle
keine Drehrichtungsumkehr
direction of rotation not reversal
Gewicht ca. 9,6 kg
weight around 9,6 kg
Kopf 360° drehbar
head 360° adjustable

Collet chuck
Spannzange ER25
DIN 6499 (0,5-16)

pin with plug-in positions
6x15°

A105826		ID-Nr.	Allg.Tol.		ZWN-IL	Maßstab	1:1.5
			150 2768-m			Werkstoff:	
			07.07.2015			Maßblatt	
		manuelle Änderung		Datum	Name	mimatic T o o l s y s t e m s	
				Bearb. 07.07.2015	Kropp		
				Gepr. 07.07.2015	Kropp		
				Norm			
				C: 00115944, SZA		mimatic 87488 Betzigau – Westendstraße 3	
				Zeichnungs-Nr.: 00047985		GmbH Tel.: 0831/57444-0 Fax.: -90	
						WK-WS5-SK40-ER25-I-SL	
						Blatt	
Zust.	Änderung	Datum	Name	Urspr.	00022582	Ers. f.:	Bl.
						Ers. d.:	Plotserver