
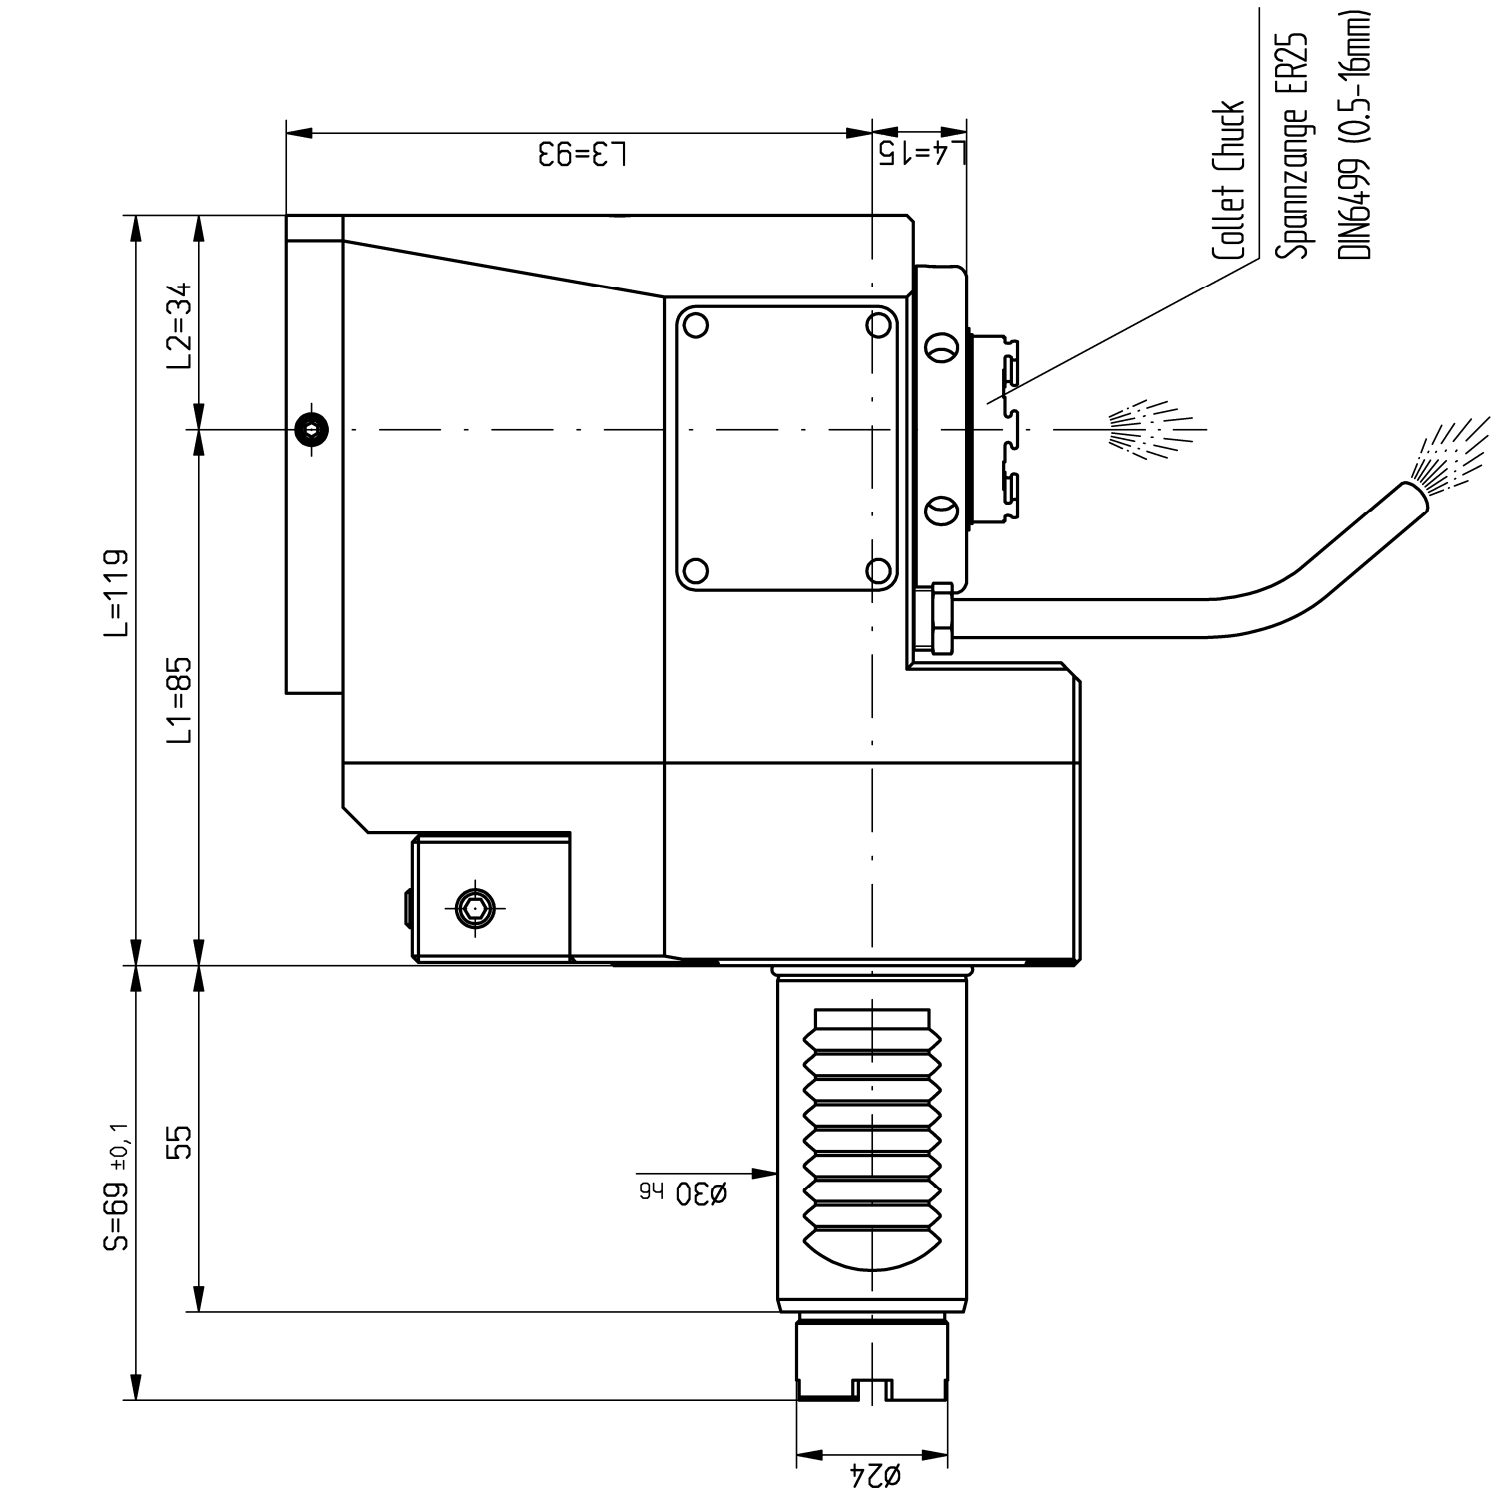
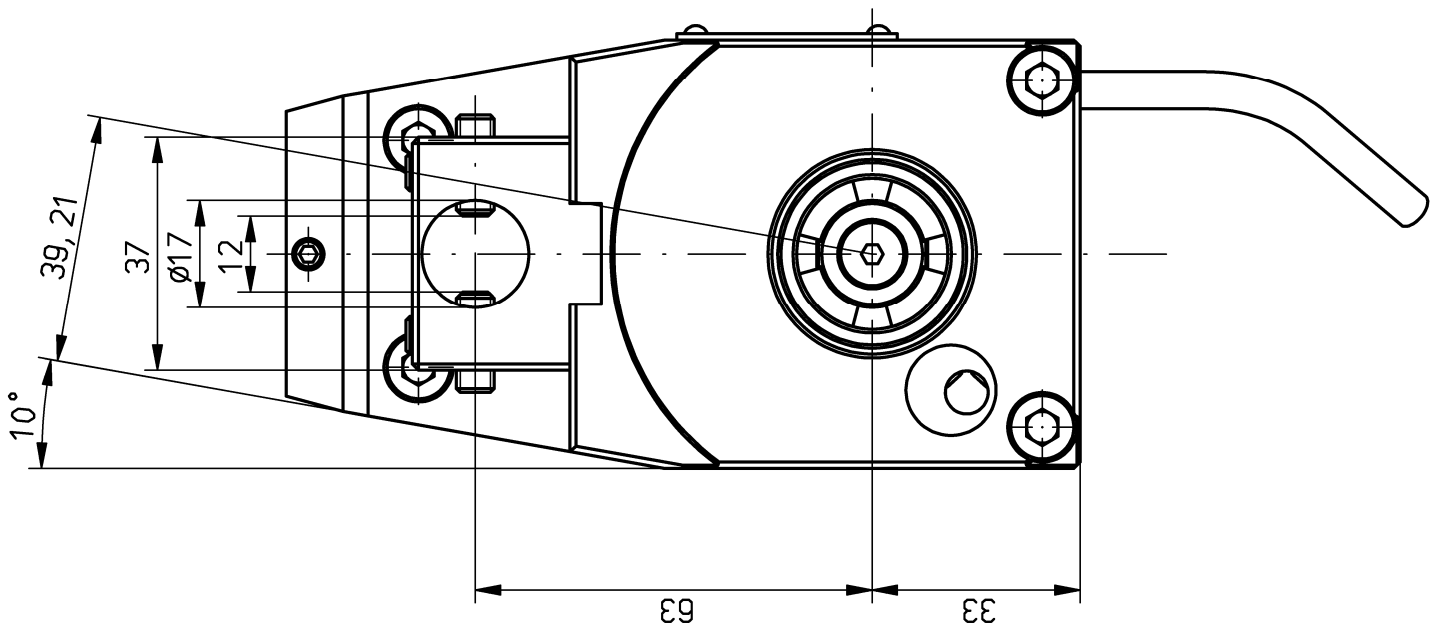


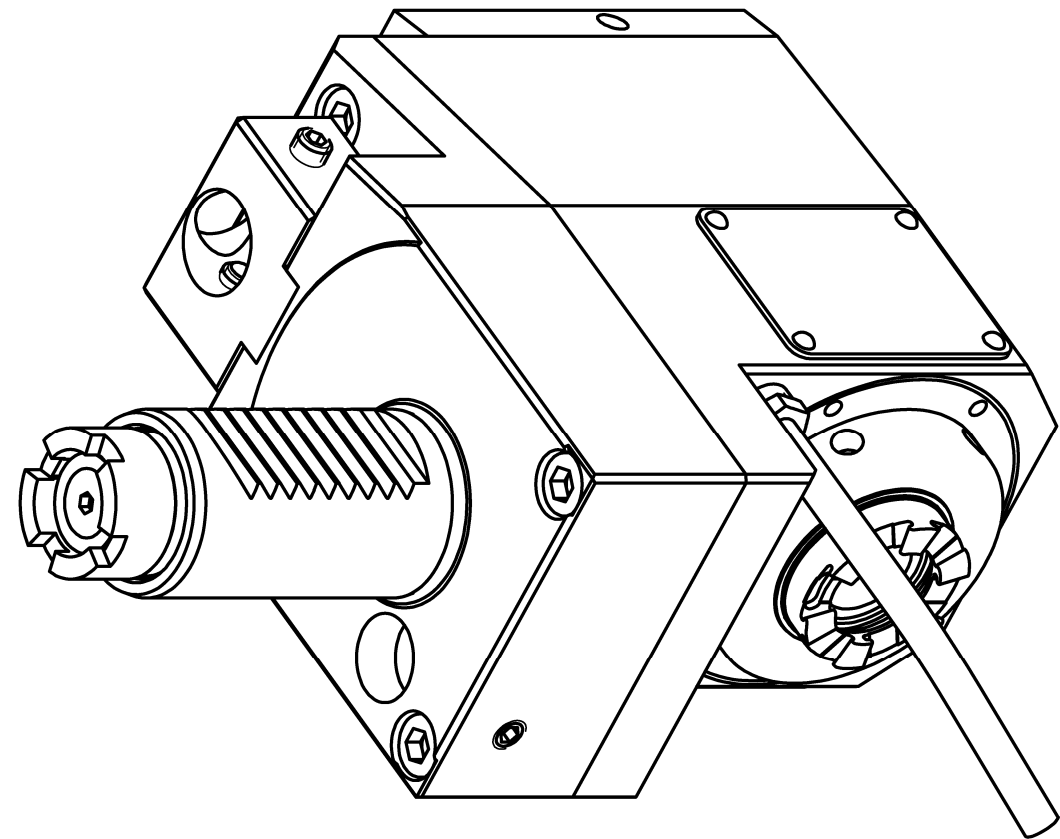


n1(max) = 6500 U/min
n2(max) = 6500 U/min
M (max) = 25 Nm
i(n1/n2) = 1 : 1
p(max) = 70bar

keine Drehrichtungsumkehr
direction of rotation not reversal

Kühlmittelzufuhr i.K. durch die Spindel
und e.K. über Spritzrohr
internal coolant supply through the spindle
and external coolant supply through pipes

Gewicht ca. 5,5kg
weight around 5,5kg

It is strictly prohibited to copy,
reproduce or develop these drawings
to third persons without having our
written permission. A copyright violation
involves a claim for damages and is
indictable if it is premeditative done.
Fa. mimatic GmbH

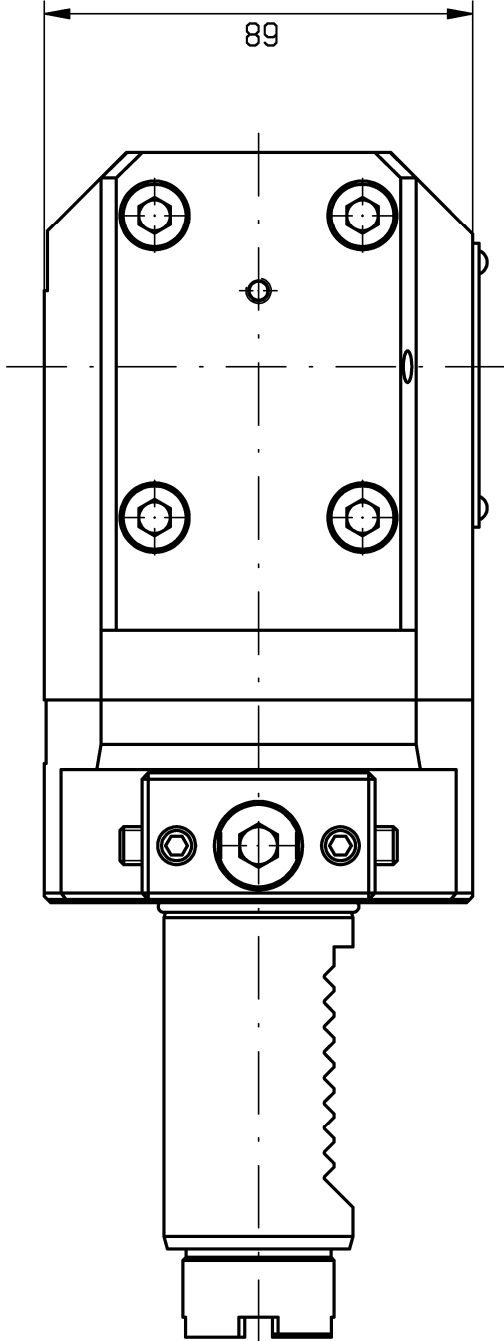

A176271		ID-Nr.	Allg. fol.		ZWN-H		
			ISO 2768-m		Werkstoff:		
			06.09.2016		Maßblatt		
					mimatic® mimatic 87488 Betzigau – Westendstraße 3 GmbH Tel.: 0831/57444-0 Fax.: -90		
			Bearb.	30.08.2011			Name
			Gepr.	06.09.2016			Schmähholz
			F/N/Q				
			dw. C: 00127954. SZ4				
			Zeichnungs-Nr.:		AGW-OK-D-30-ER25-I		
			00039753		L1=85 i=1:1 S=69 Links		
01	Standard 2016	06.09.2016	Schma		Blatt		
Zust.	Änderung	Datum	Name	Urspr. 00038943/00029170	Ers. f.:		
					Ers. d.: Plotserver		