
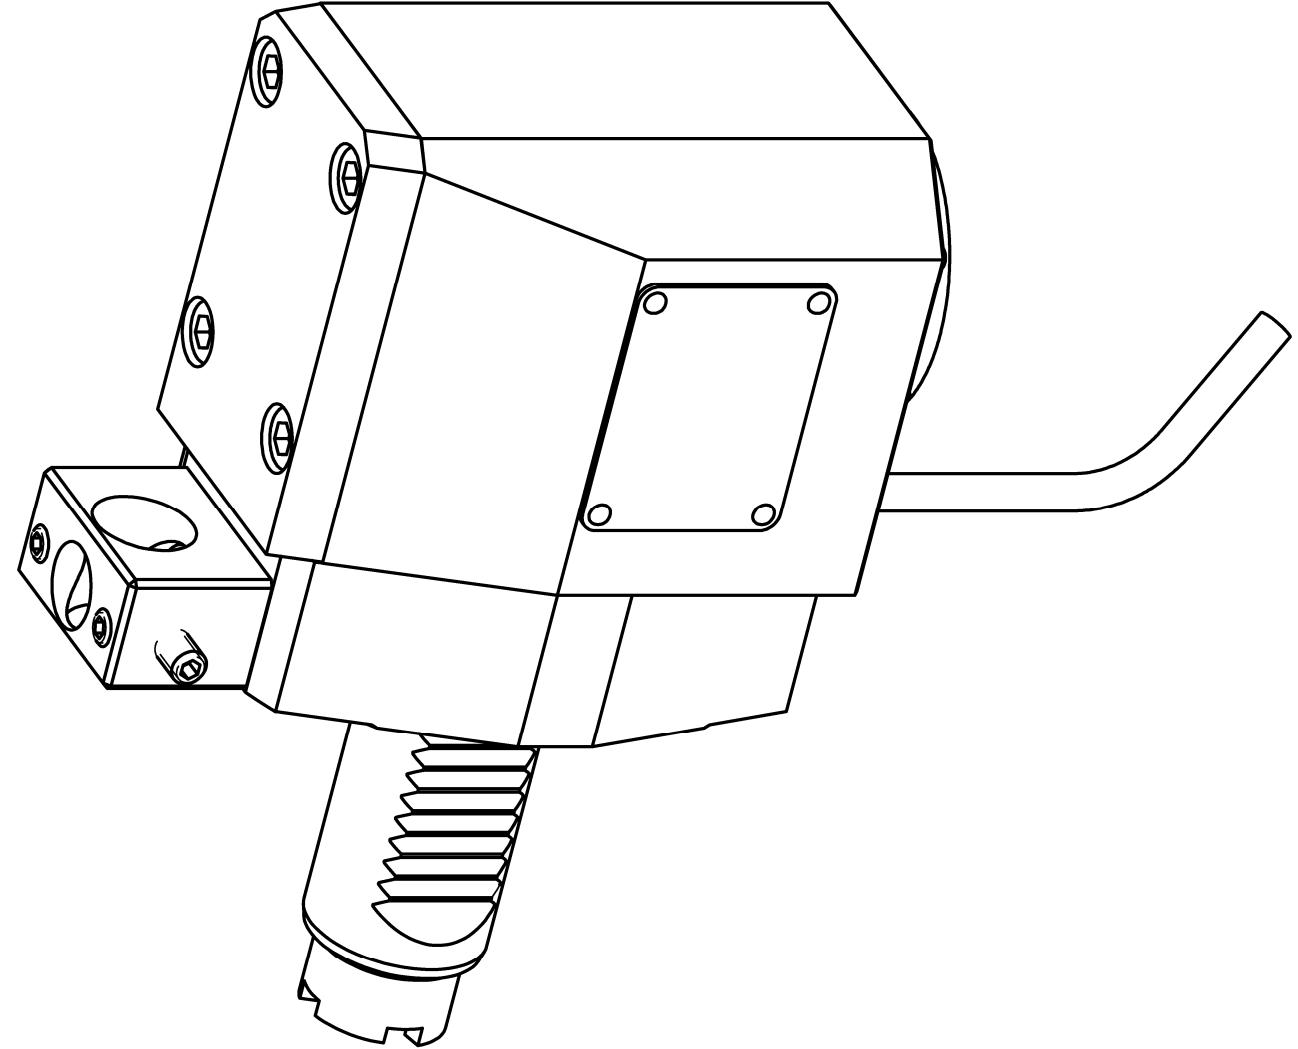
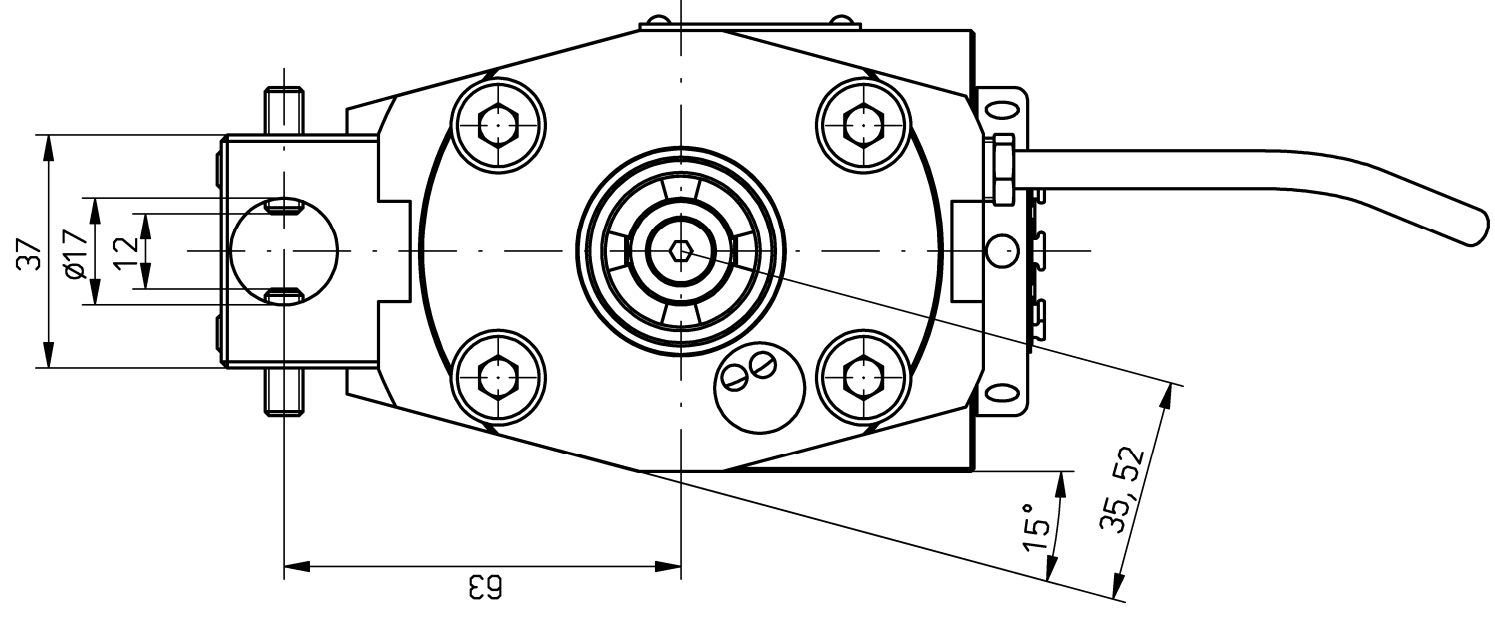


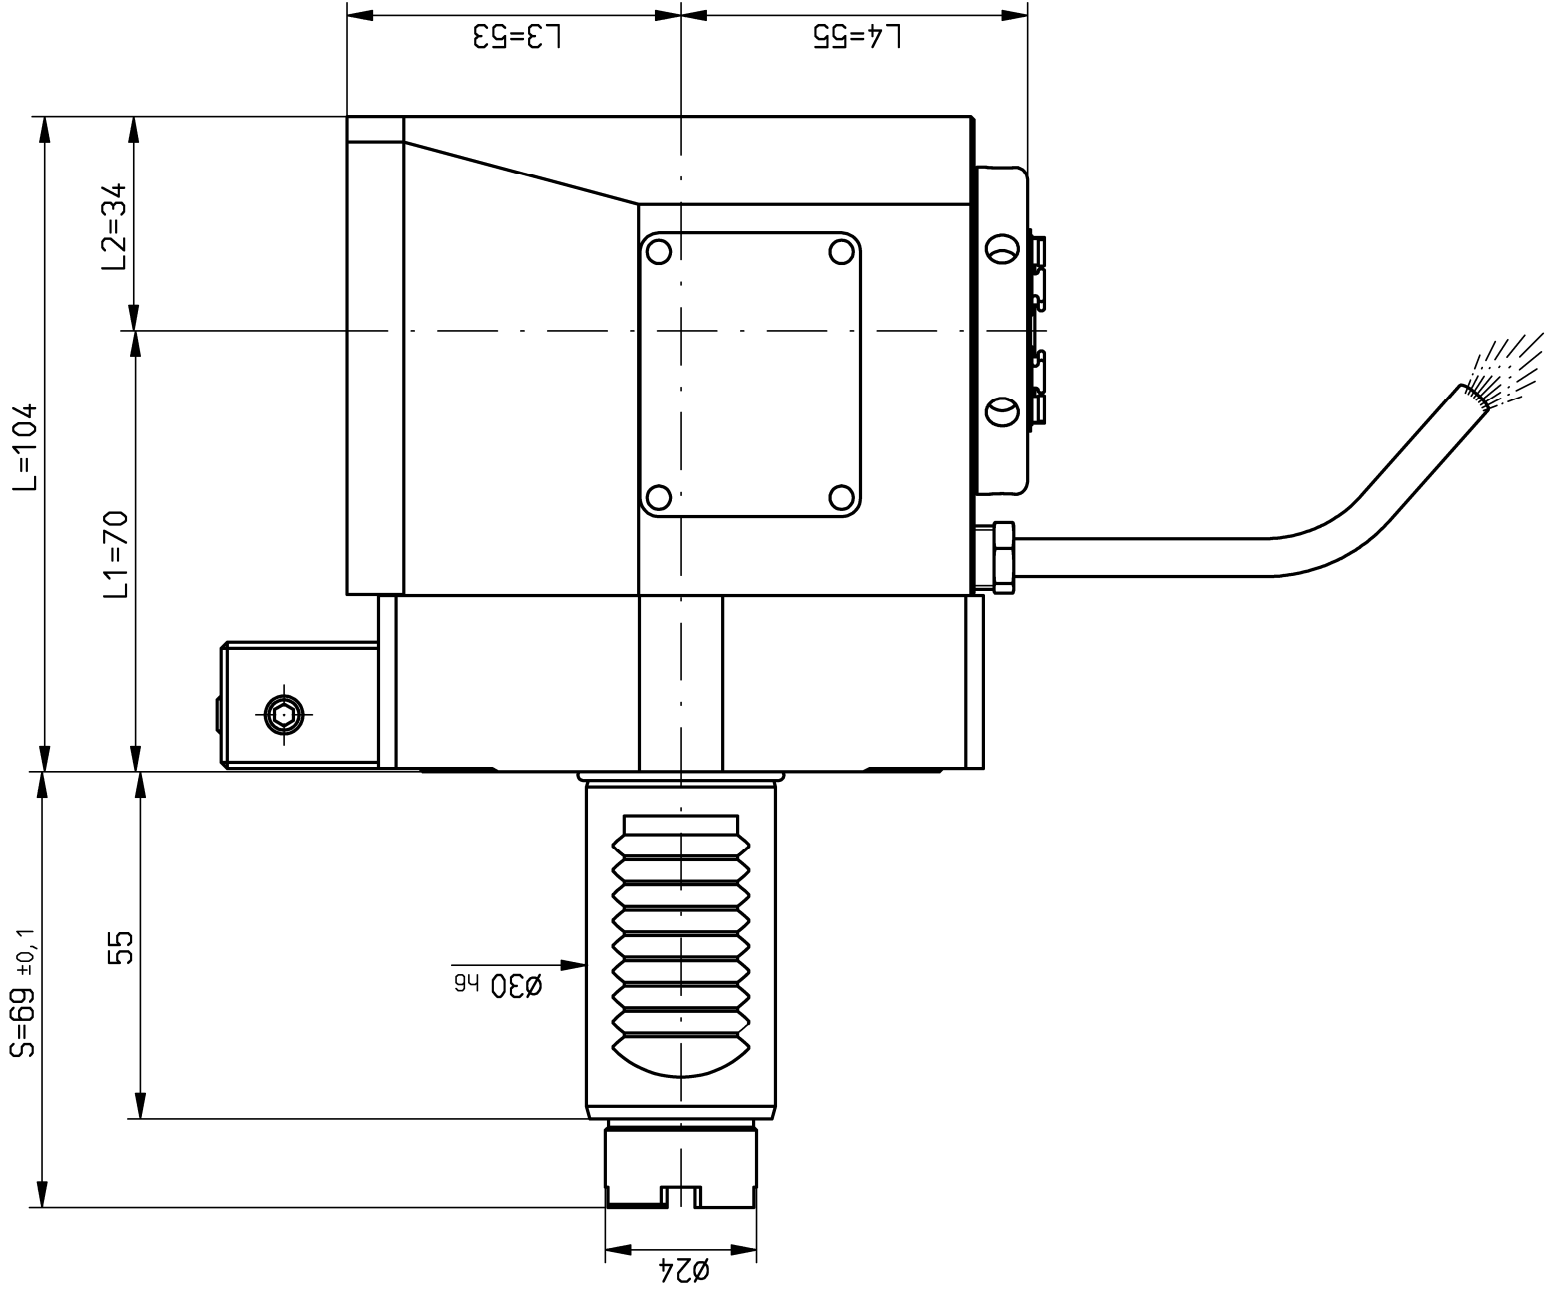


n1(max) = 6500 U/min
n2(max) = 6500 U/min
M (max) = 30 Nm
i (n1/n2) = 1 : 1

keine Drehrichtungsumkehr
direction of rotation not reversal

Kühlmittelzufuhr e.K. über Spritzrohr
external coolant supply through pipes

Gewicht ca. 5kg
weight around 5kg

Kopf 180° gedreht montierbar
head 180° adjusted mountable

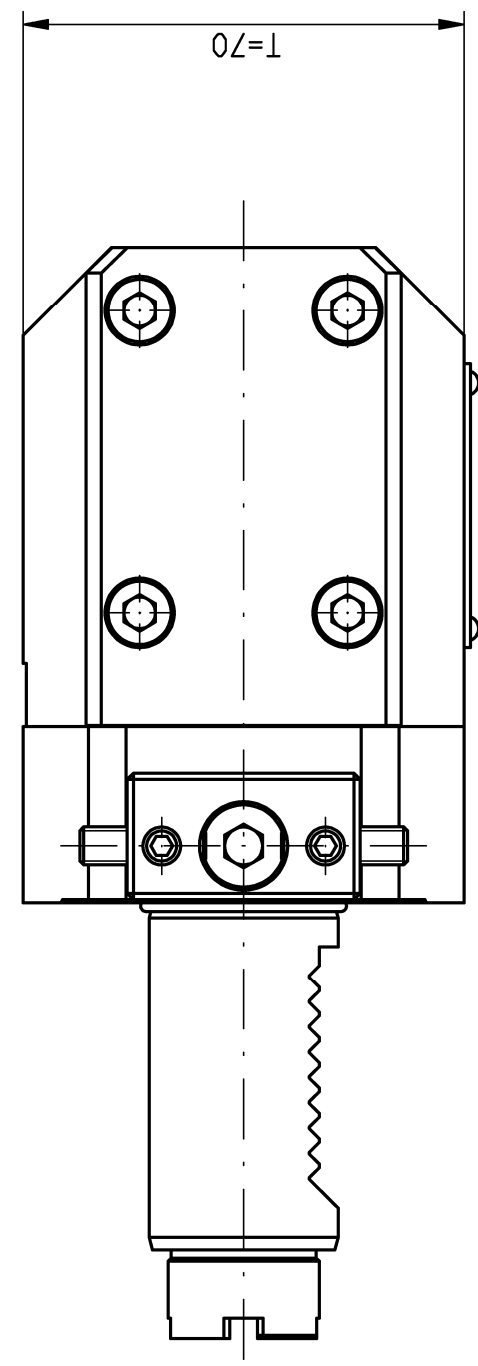

Only for information !
When one change, the drawing does not interchange
It is strictly prohibited to copy, reproduce or develop these drawings to third persons without having our written permission. A copyright violation involves a claim for damages and is indictable if it is premeditative done.
Fa. mimatic GmbH

A103496			ID-Nr.	Allg. Tol.		ZWN		Maßstab 1:1	
A10000005				ISO 2768-m				Werkstoff:	
manuelle Änderung				11.07.2016				Maßblatt	
					Datum	Name		mimatic® mimatic 87488 Betzigau – Westendstraße 3 GmbH Tel.: 0831/57444-0 Fax.: -90 AGW-OK-C-30-ER25-E L1=70 i=1:1 S=69 LB200 Blatt	
				Bearb.	05.09.2007	Zukel			
				Gepr.	10.07.2016	Holtzheu			
				F/M/Q					
				dw. C.	00125580. SZA				
02	Standard 2016	20.06.2016	Schnitt	Zeichnungs-Nr.:					
01	Text	15.03.2013	Ess	00025075-1					
Zust.	Änderung	Datum	Name	Urspr.	00025075			Ers. d.: Plotsrserver	