
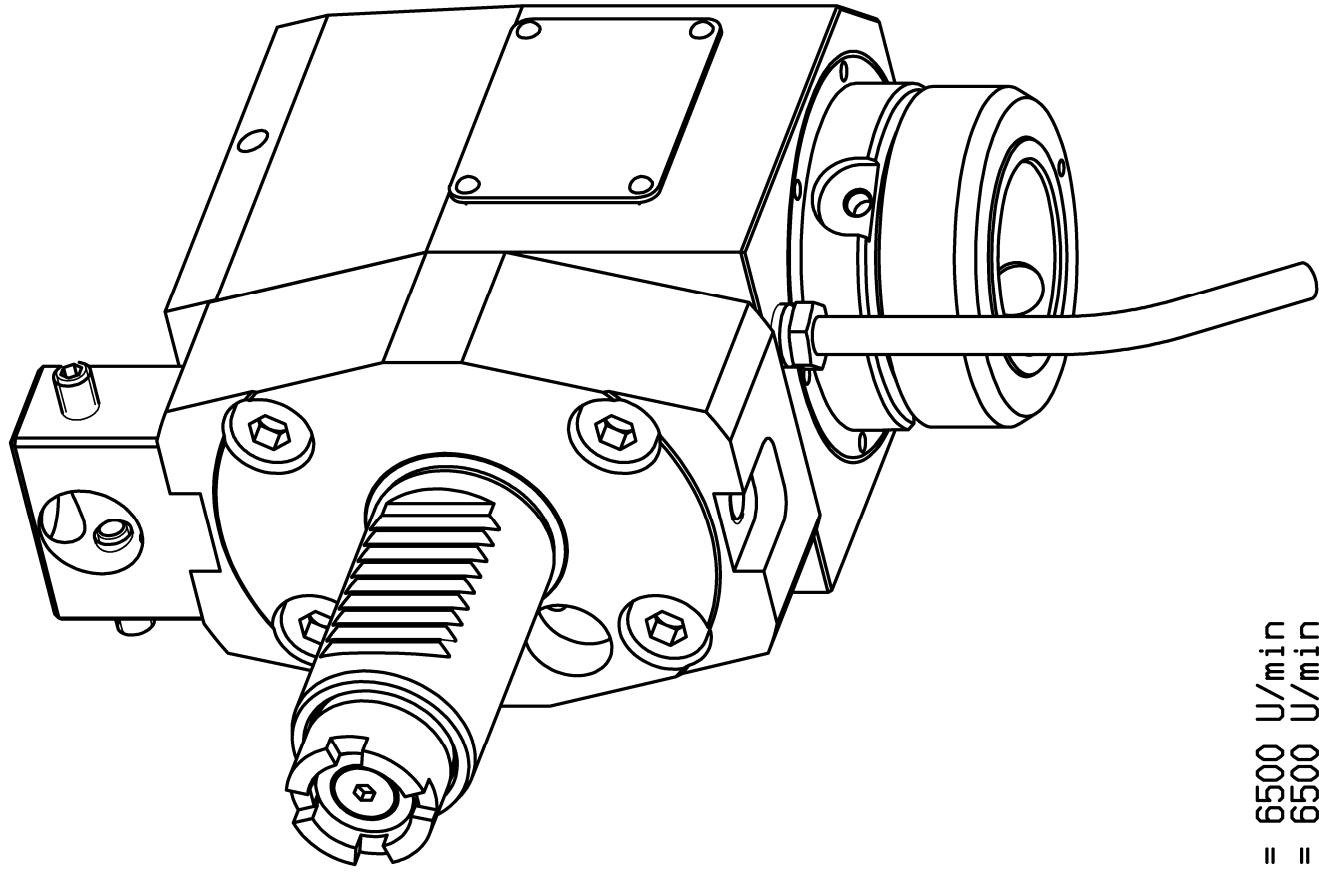


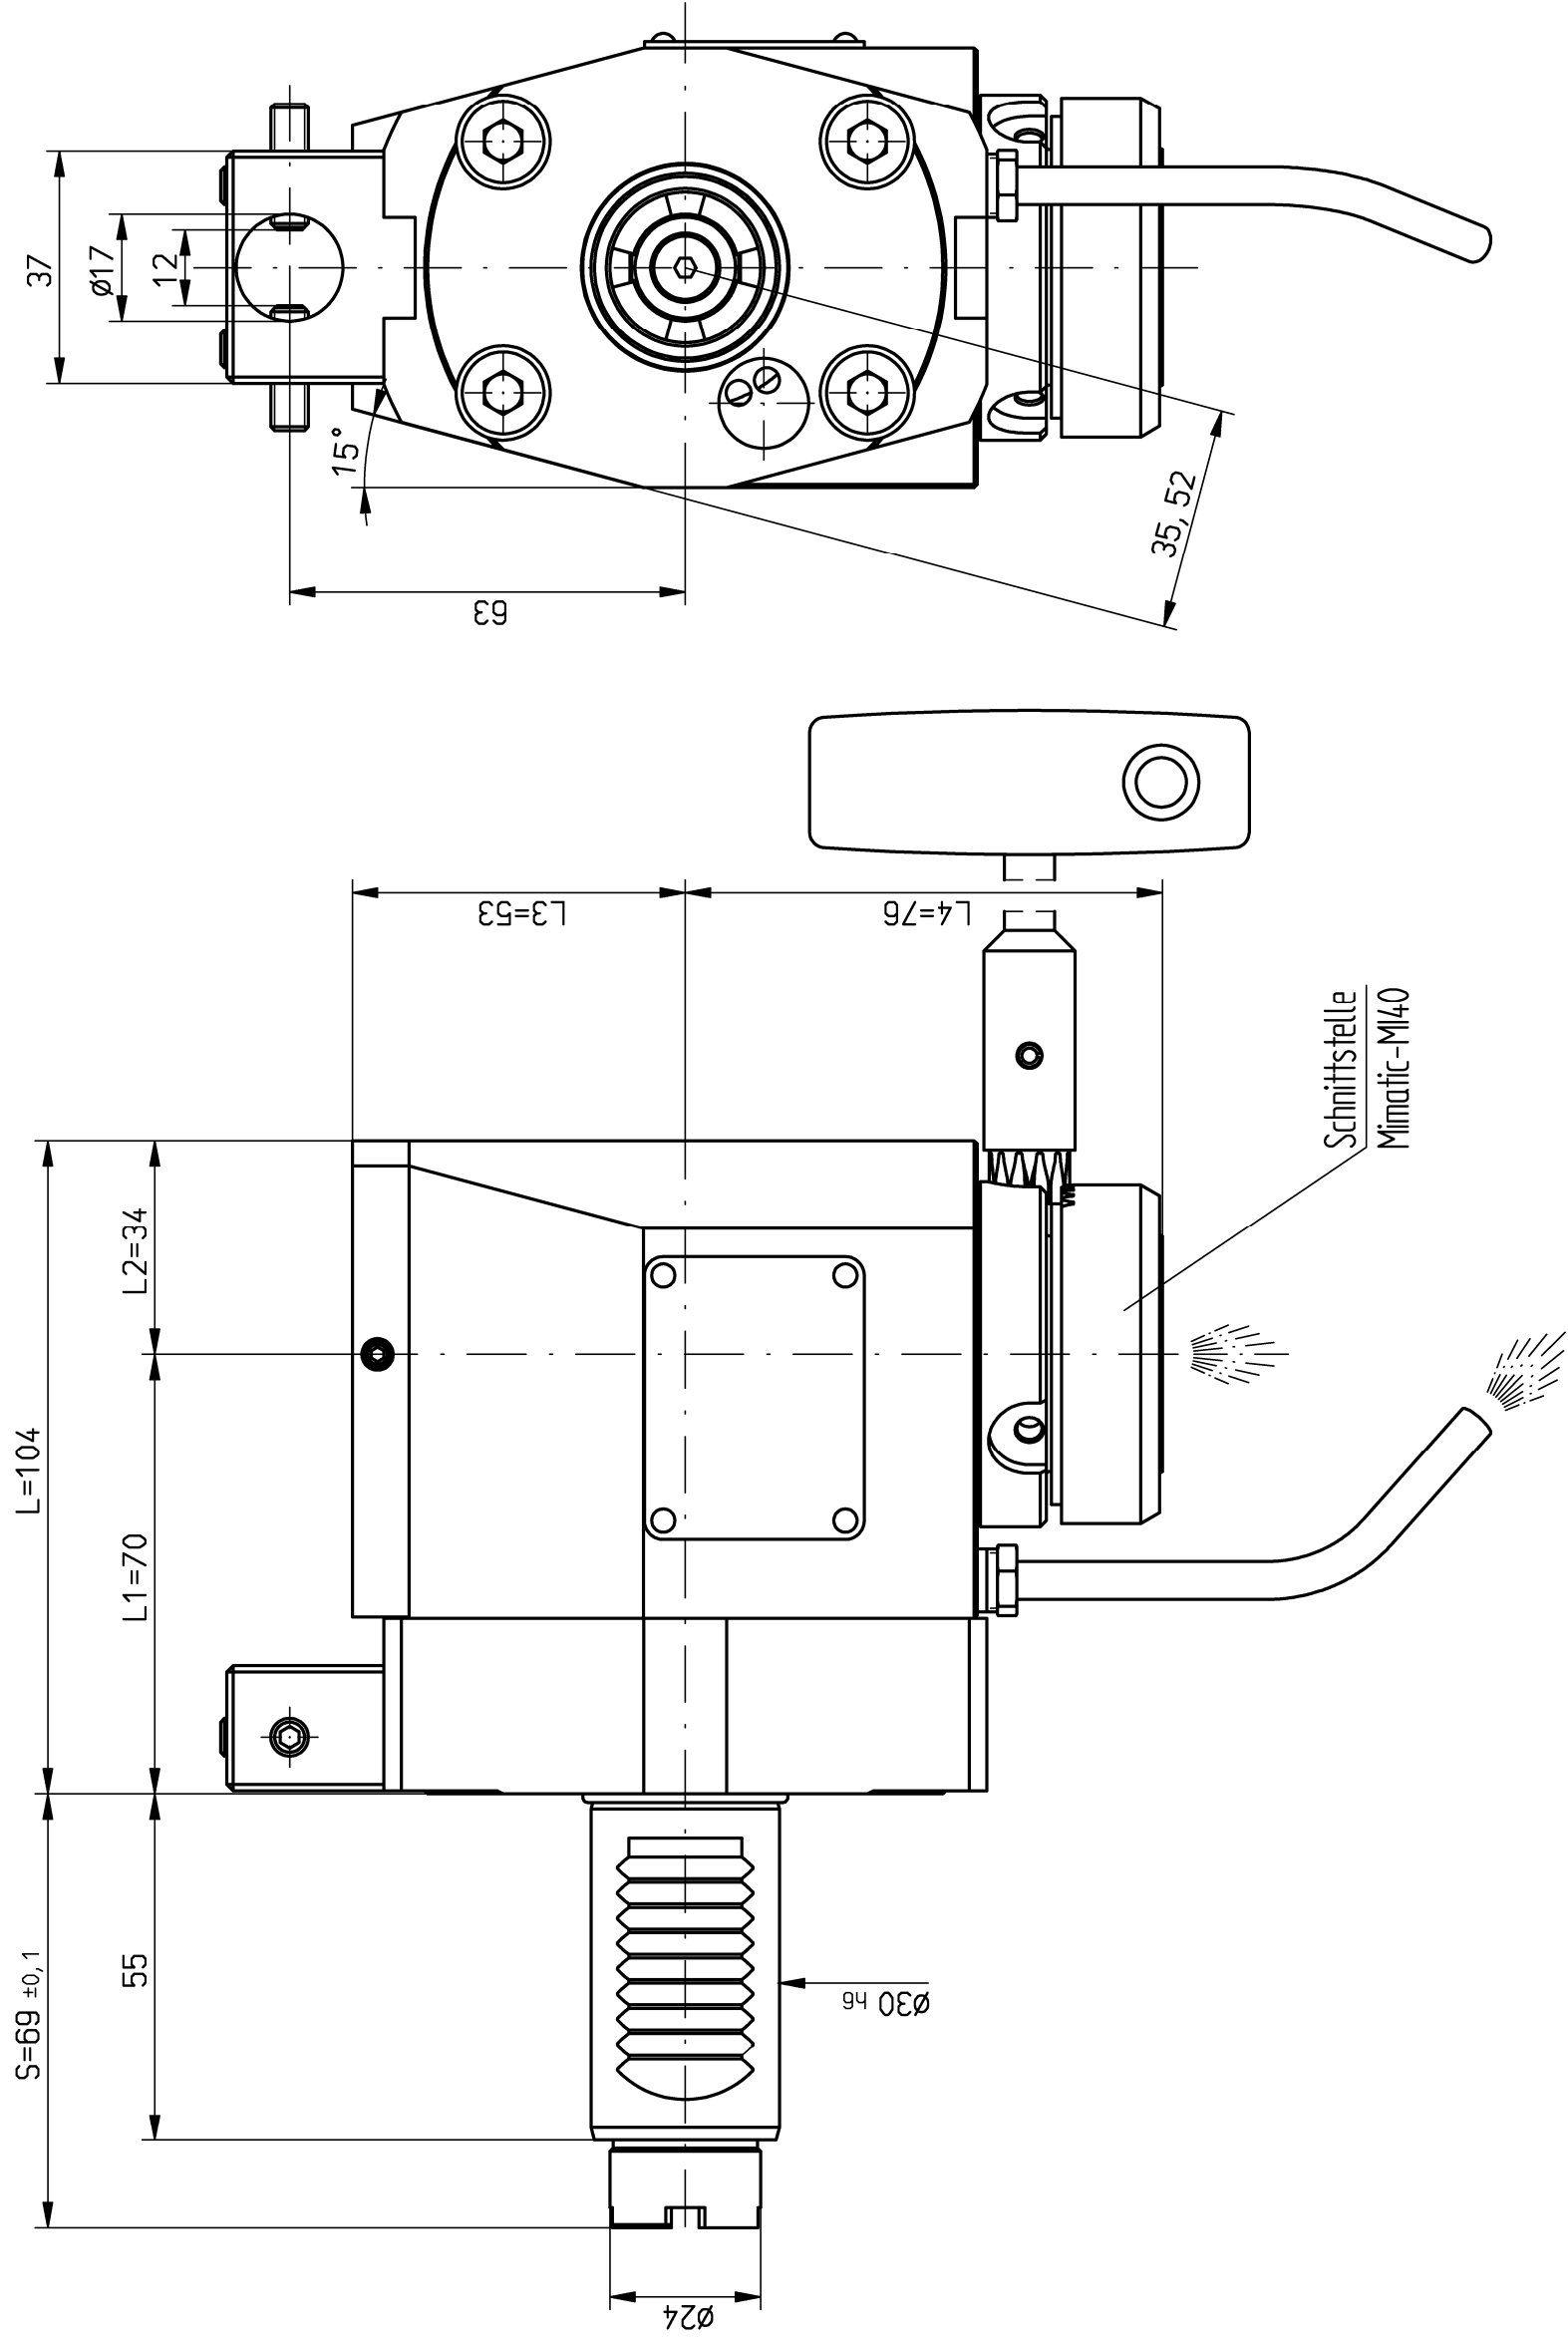

$n1(\max)$	=	6500 U/min
$n2(\max)$	=	6500 U/min
$M(\max)$	=	30 Nm
$i(n1/n2)$	=	1 : 1
$p(\max)$	=	70bar

keine Drehrichtungsumkehr
direction of rotation not reversal


Kühlmittelzufuhr i.K. durch die Spindel und e.K. über Spritzrohr
internal coolant supply through the spindle and external coolant supply through pipes

Gewicht ca. 5kg
weight around 5kg

Kopf 180° gedreht montierbar
head 180° adjusted mountable

Only for information !

When one change, the drawing does not interchange.

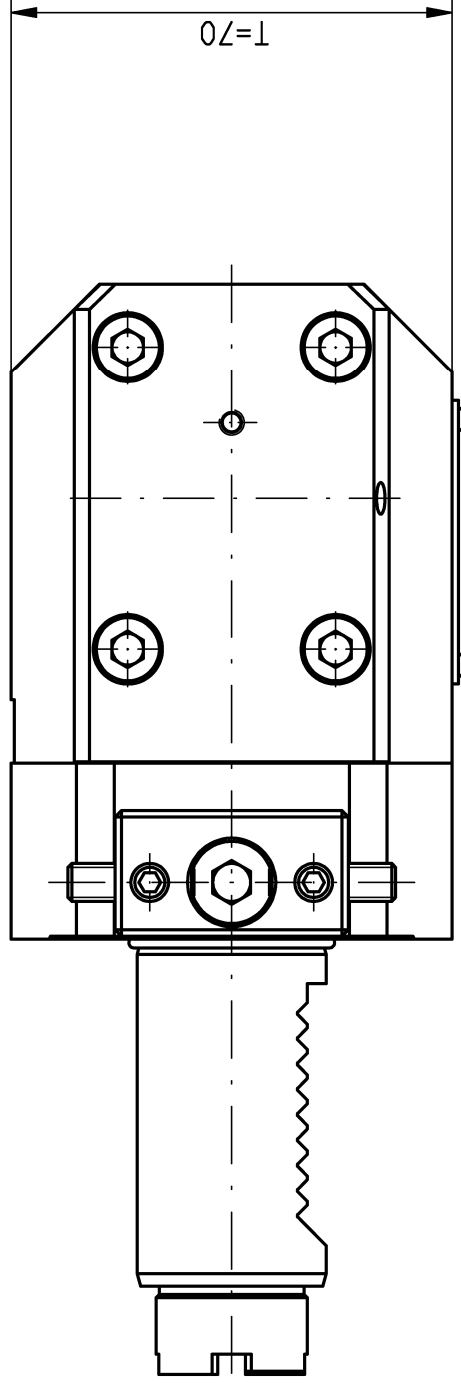

A103537		ID-Nr.		Allg. Tol.		ZWN-AL	
A10000051				ISO 2768-m			
manuelle Änderung				11.07.2016			
				Datum	Name		
				Bearb. 06.02.2007	Krupp		
				Gepr. 11/07/2016	Halzhu		
				F/M/Q			
				abw. C. 00125626: SZA			
				Zeichnungs-Nr.:			
02	Standard 2016	20.06.2016	Strich	00025088			
01	gem. Z überarbeitet	26.10.2011	Halzhu				
Zust.	Änderung	Datum	Name	Urspr. 00028392-Z			
Ers. f.:		Ers. d.		Plotserver			