
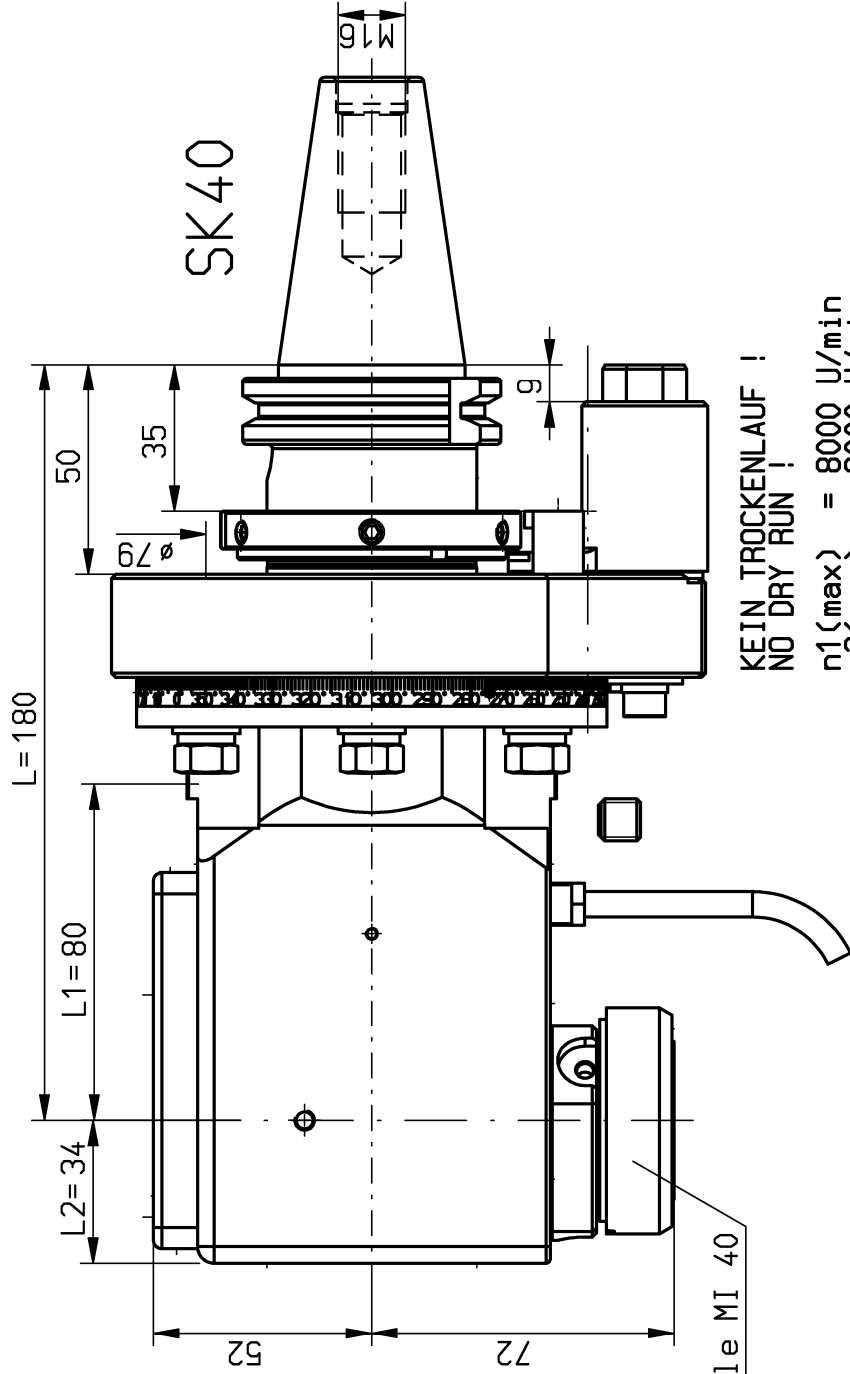


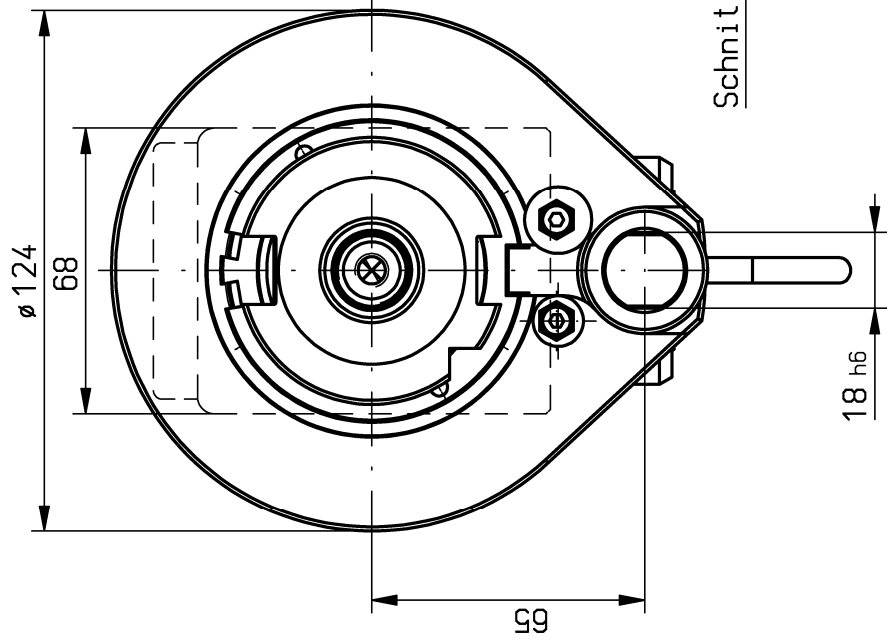

Schnittstelle MI 40

KEIN TROCKENLAUF !
NO DRY RUN !


n1(max) = 8000 U/min
n2(max) = 8000 U/min
M (max) = 30 Nm
i(n1/n2) = 1 : 1
p(max) = 70bar
Filterfeinheit: max. 0,05mm
grade of filtration: max. 0,05mm

Drehrichtungsumkehr
direction of rotation reversal

Kühlmittelfzufuhr i.K. durch die Spindel
und e.K. über Spritzrohr
internal coolant supply through the spindle
and external coolant supply through pipes

Kopf 360° drehbar
head 360° adjustable

Gewicht ca. 7.5kg
weigh around 7.5kg

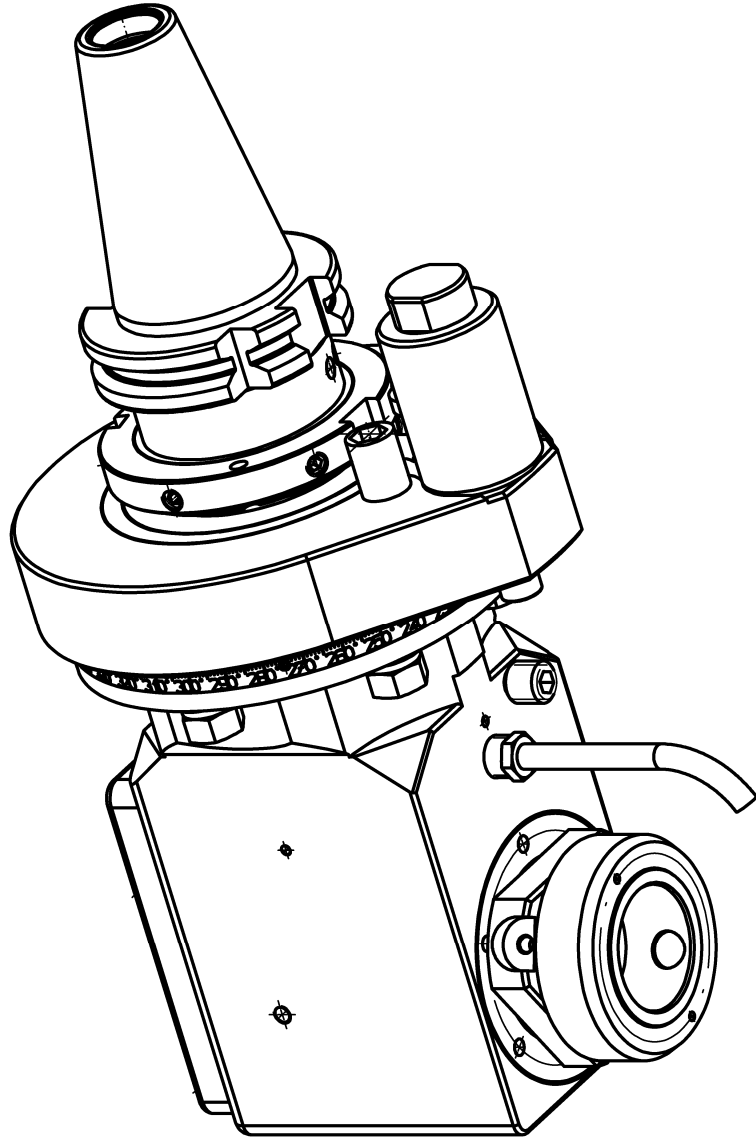

A105513		ID-Nr.	Allg. Tol.		ZW-FB	Maßstab	1:1.5	265635
		manuelle Änderung	ISO 2768-m			Werkstoff: Maßblatt		
				Datum	Name	mimatic® Tool Systems mimatic 87488 Betzigau – Westendstraße 3 GmbH Tel.: 0831/57444-0 Fax.: -90 WK-SW5-SK40-MI40-I L=180 A=65 18h6		
			Bearb.	1106.2015	Holzheu			
			Gepr.	1106.2015	Holzheu			
			F/N/Q					
			C: 00115212.SZA			Blatt		
			Zeichnungs-Nr.:					
			00047829			Ers. f.:		
Zust.	Änderung	Datum	Name	Ur-spr.	00039632			
						Ers. d.: Plotserver		