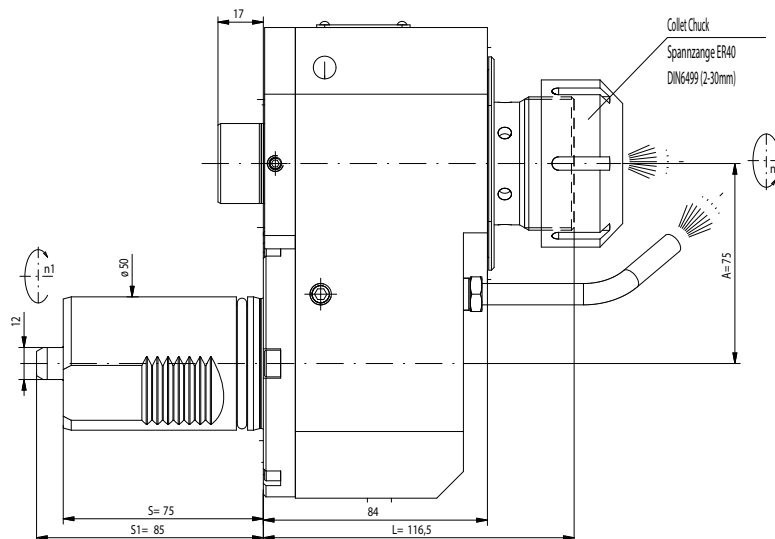


Trockenlauf konstant möglich
continuous dry run possible



$n1(max) = 6500 \text{ U/min}$
 $n2(max) = 6500 \text{ U/min}$
 $M(max) = 100 \text{ Nm}$
 $i(n1/n2) = 1:1$
 $p(max) = 70 \text{ bar}$

Filterfeinheit: max. 0,05mm
grade of filtration: max. 0,05mm

Drehrichtungsumkehr
direction of rotation reversal

Kühlmittelzufuhr i.K. durch die Spindel
und e.K. über Spritzrohr
internal coolant supply through the spindle
and external coolant supply through pipes

Gewicht ca. 11kg
weight around 11kg

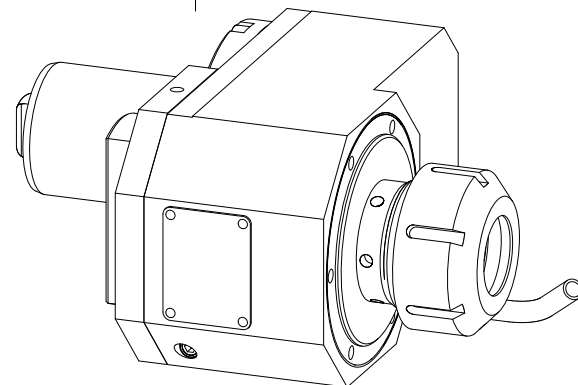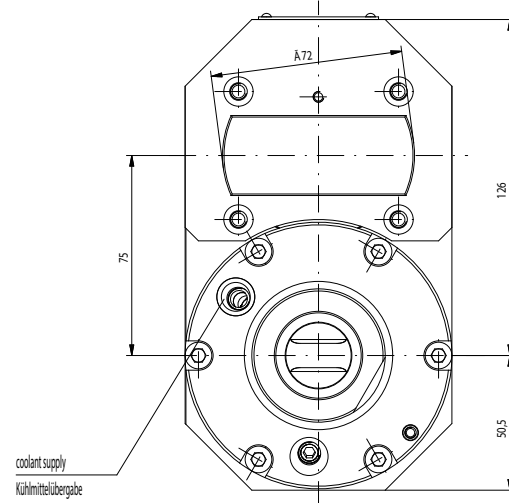

A189966		ID-Nr.	Allg. Tol.	ISO 2768-m	2018	Maßstab	1:1
monatliche Änderung				Datum	Name	Werkstoff: Maßblatt	
						 87488 Betzgau · Westendstraße 3 Tel.: 0931/57444-0 Fax: -90	
						AGW-MA-B-50-ER40-I	
						A=75 i=1:1 L116,5 MP630	
						Blatt	
						B.	
						Eck:	
						Eck:	