
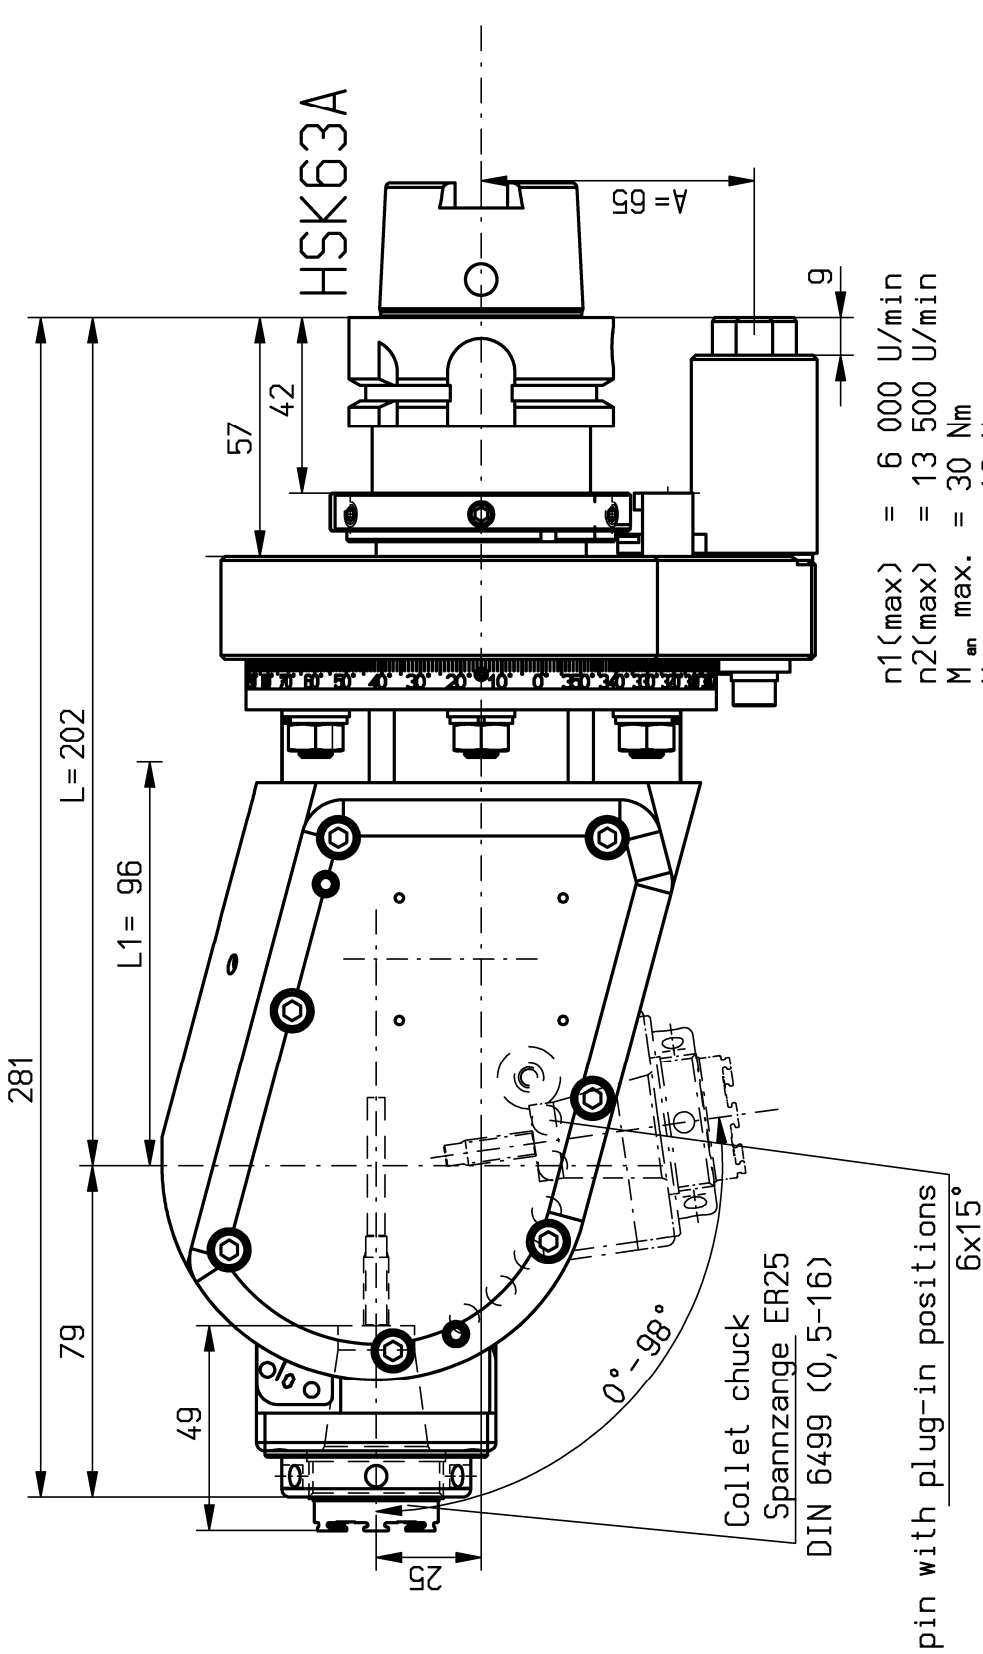


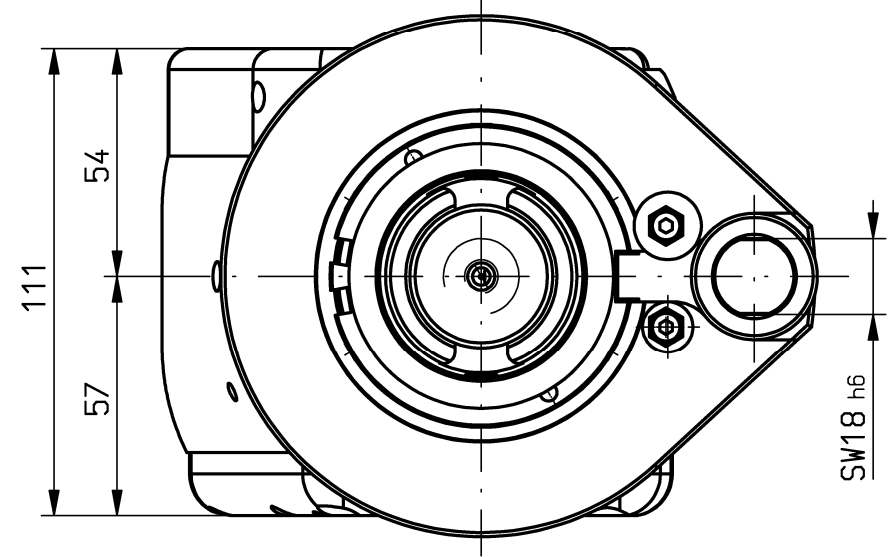


Collet chuck
Spannzange ER25
DIN 6499 (0,5-16)

pin with plug-in positions
6x15°

- n1(max) = 6 000 U/min
- n2(max) = 13 500 U/min
- M_{an} max. = 30 Nm
- M_{ab} max. = 12 Nm
- i(n1/n2) = 1 : 2, 25 ("Schnell-Läufer")
- p(max) = 70bar

Kühlmittelfuhr i.K. durch die Spindel
internal coolant supply through the spindle
keine Drehrichtungsumkehr
direction of rotation not reversal
Gewicht ca. 9,6 kg
weight around 9,6 kg
Kopf 360° drehbar
head 360° adjustable

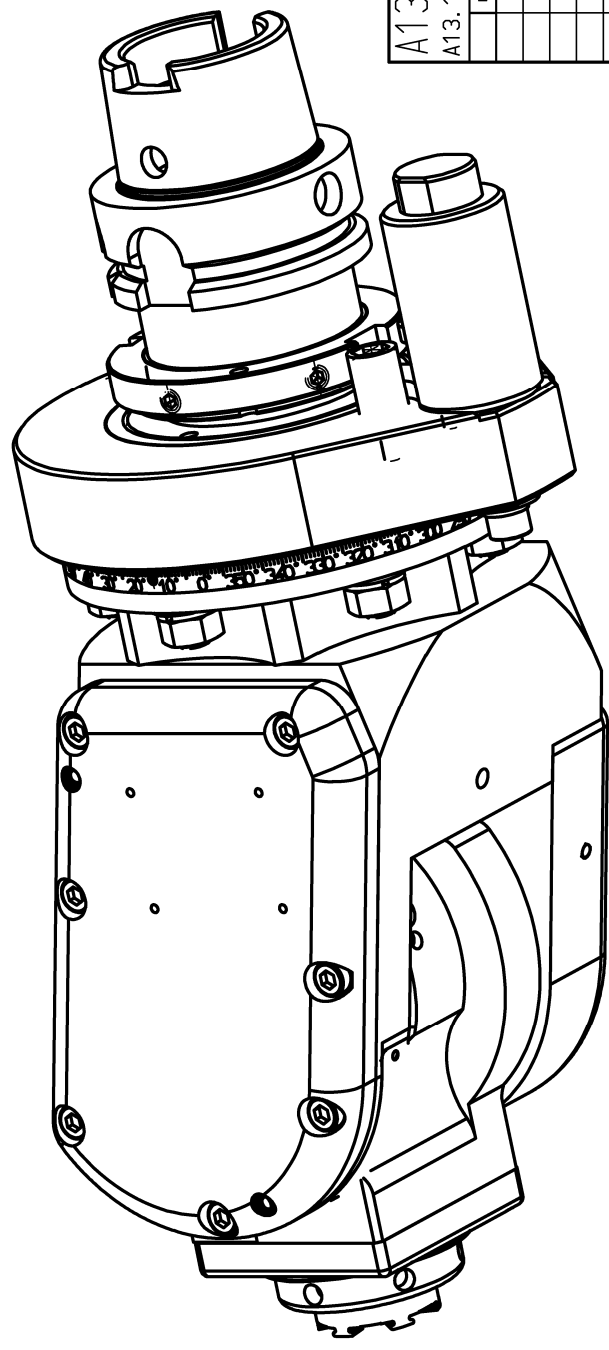

A135832		ID-Nr.		Allg. Tol.		ZWN-IL		Maßstab 1:1,5	
A13.19.512.21.003				ISO 2768-m		26.05.2015		Werkstoff:	
manuelle Änderung								Maßblatt	
				Datum		Name		mimatic T o o l s y s t e m s	
				Bearb. 30.03.2006		Ess			
				Gepr. 26.05.2015		Schmalholz			
				Norm					
						C: 00114791, SZA		mimatic 87488 Betzigau – Westendstraße 3	
						Zeichnungs-Nr.:		GmbH Tel.: 0831/57444-0 Fax.: -90	
						00022672		WK-WS5-HSK63-ER25-I-SL	
								Blatt	
								L=202 A=65 i=1:1	
01		IK-Übergab.-Indexier		26.05.2015		Schma		Bl.	
Zust.		Änderung		Datum		Name		Ers. f.:	
						Ur-spr. 00022589		Ers. d.: Plotserver	